



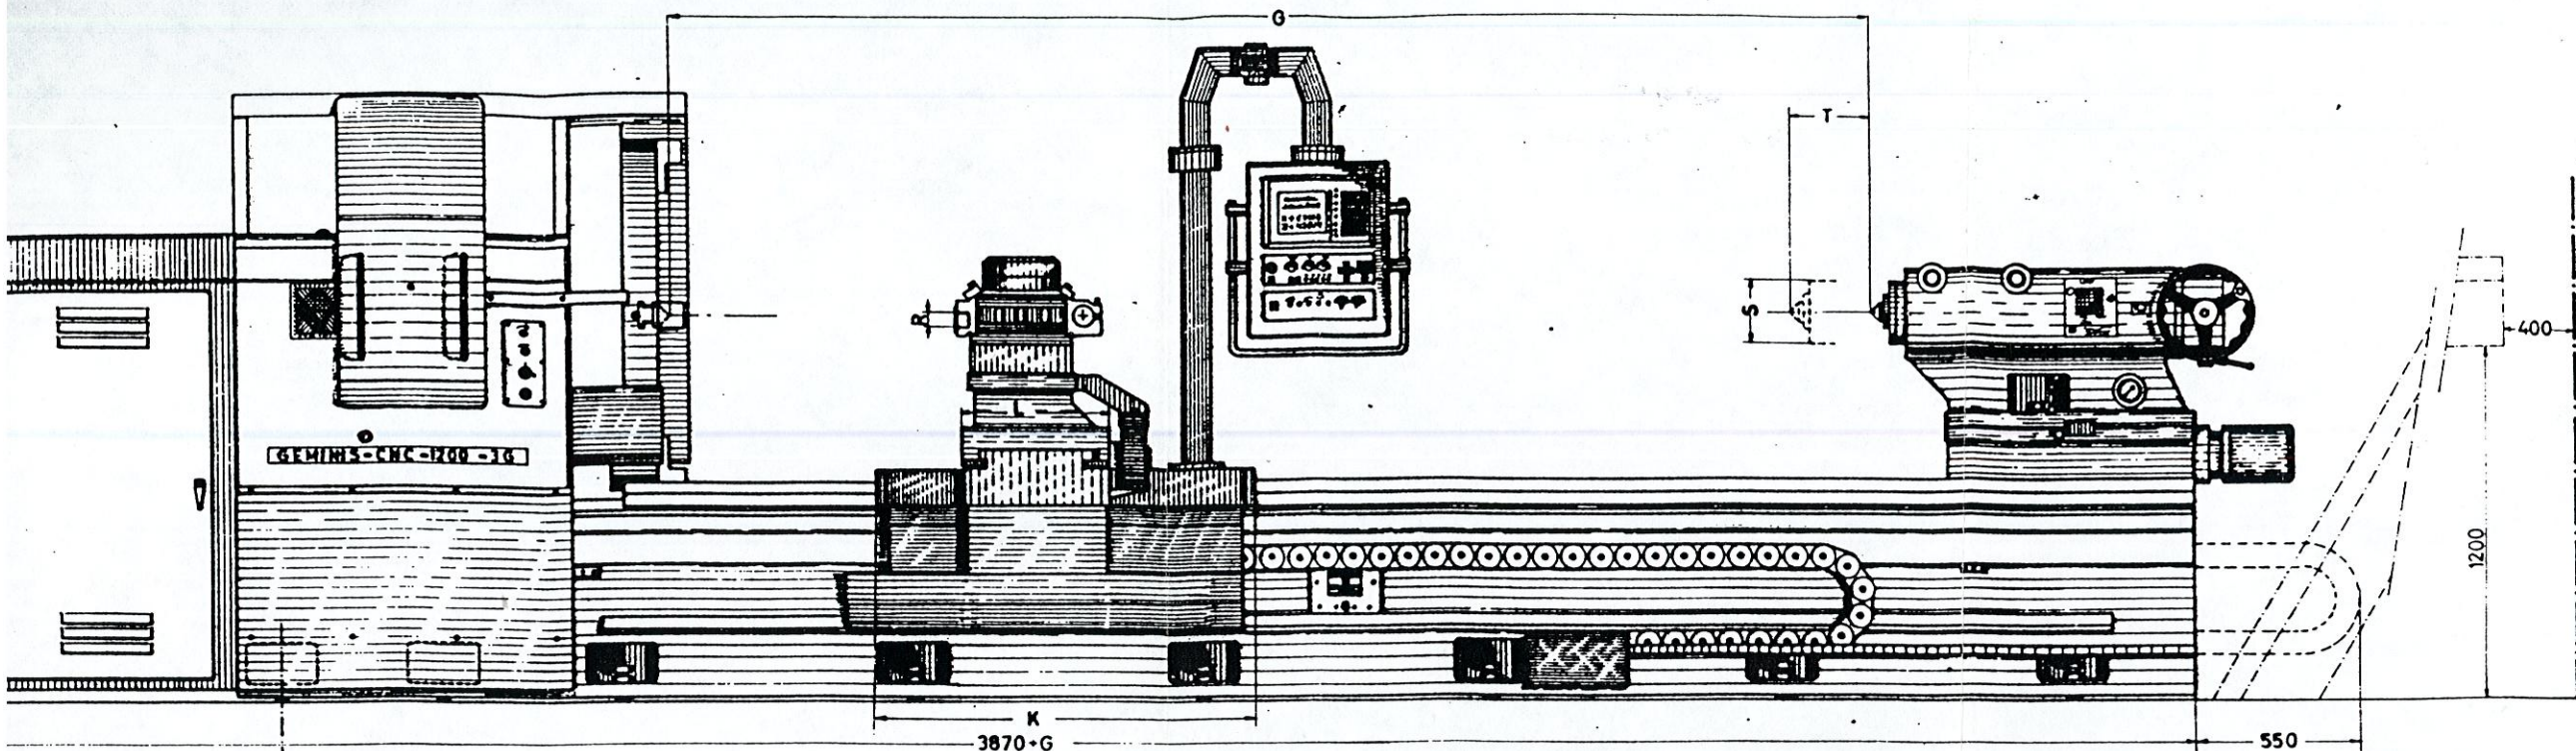



REFERENCIA Z
(REFERENCE Z)

6570 + G




COTA	MODELO CNC (MODEL)			
	1000-3G	1200-3G	1400-3G	1600-3G
A	510	610	710	810
B	700	900	1100	1290
D	1000	1200	1400	1600
G		1...12		
H		150		
J		80		
K		1300		
L		510		
M		720		814
R		40		
S		220		
T		270		
U		1150		
V		700		

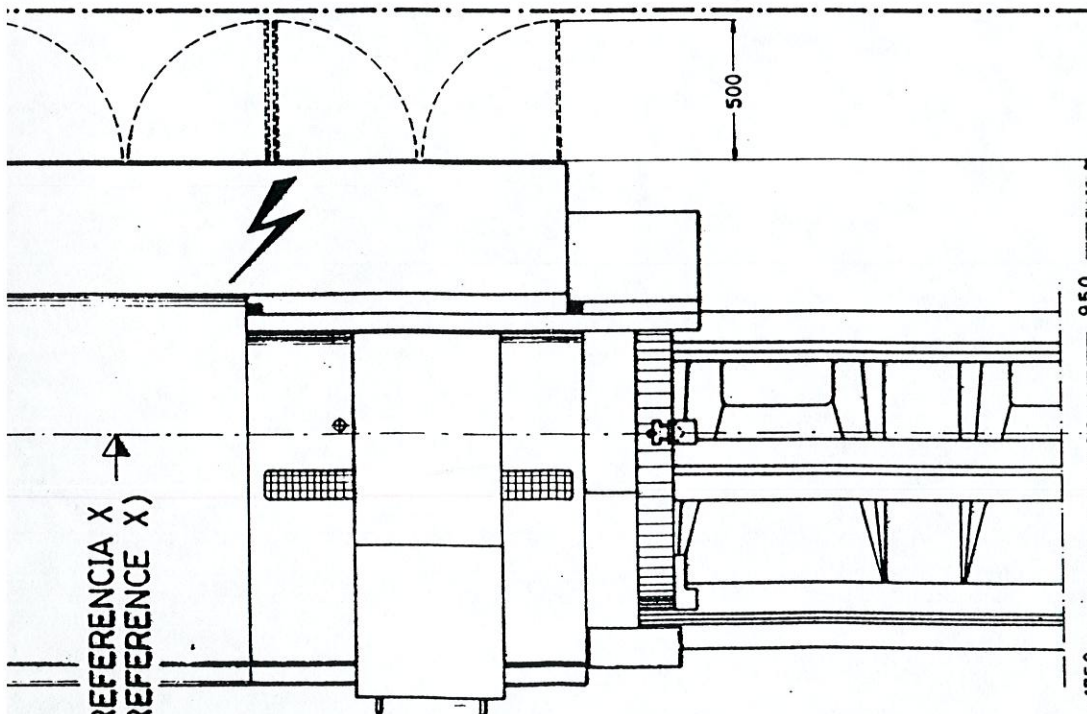




REFERENCIA X
(REFERENCE X)

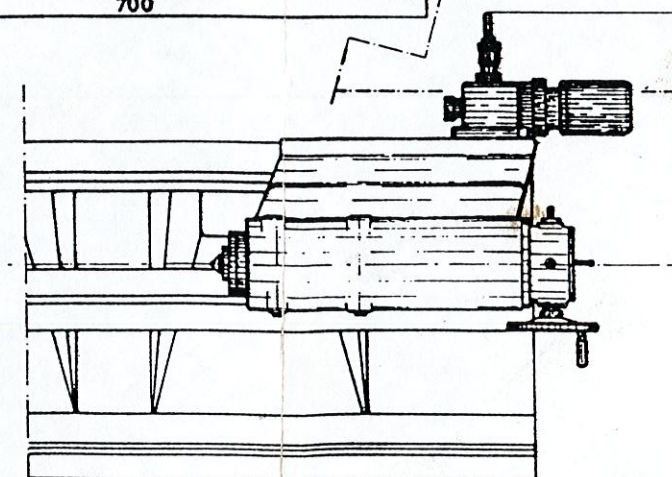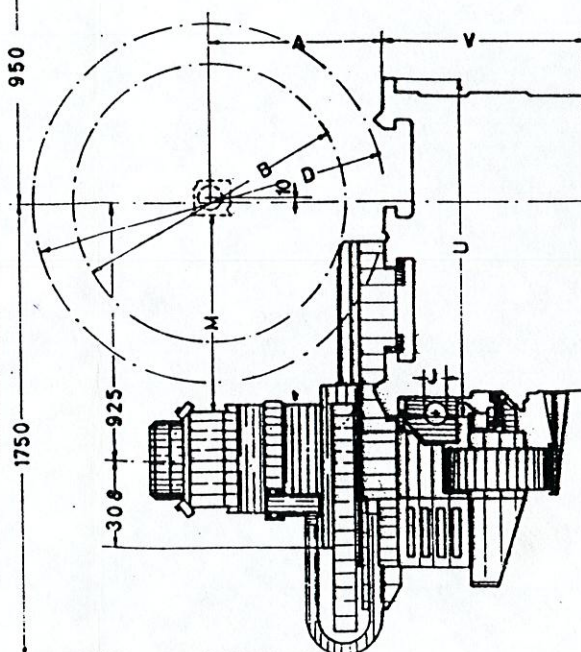

Observaciones

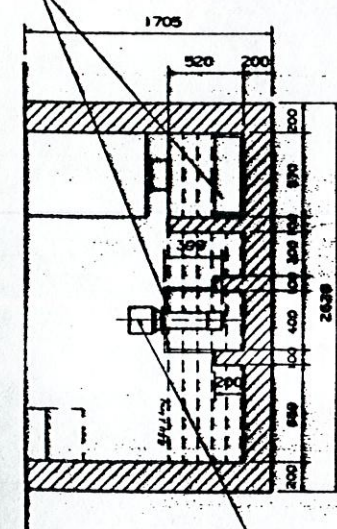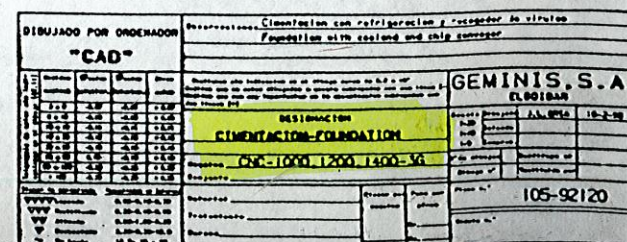

Electro-bombe CMJ-MB 5/3
(Electro-pump CMJ-MB 5/3)

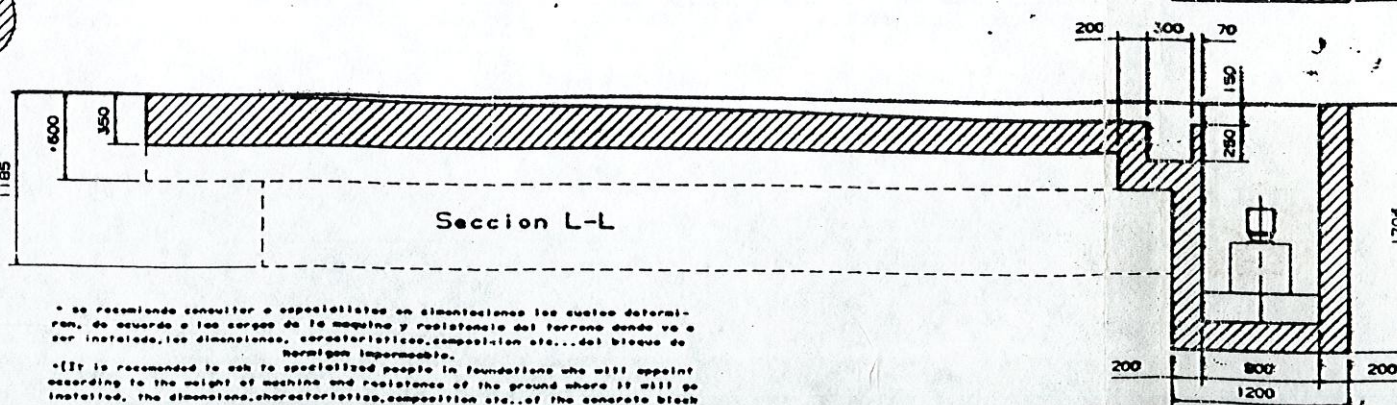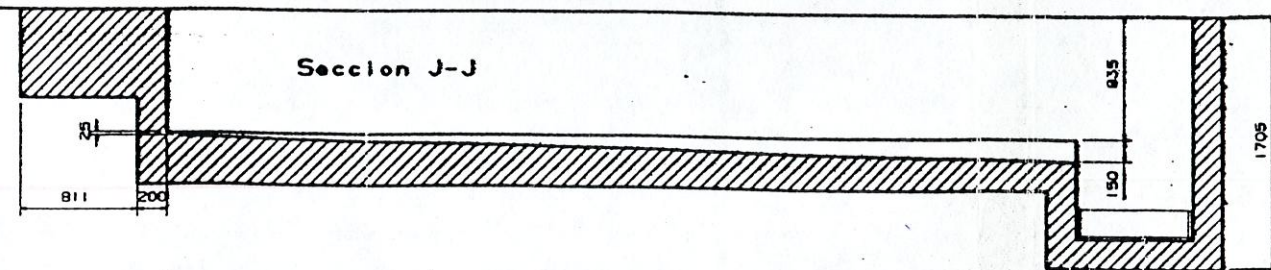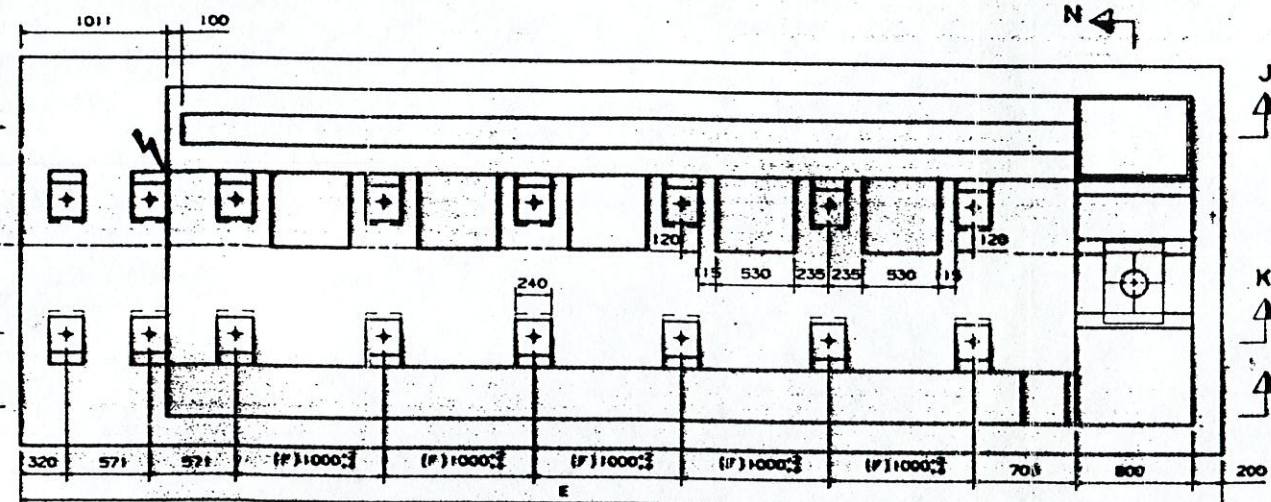

* Se recomienda consultar a especialistas en cimentaciones las cuales determinen, de acuerdo a los cargas de la maquina y resistencia del terreno donde va a ser instalado, las dimensiones, características, composición etc... del bloque de hormigon impermeable.

(It is recommended to ask to specialized people in foundations who will appoint according to the weight of machine and resistance of the ground where it will go installed, the dimensions, characteristics, composition etc., of the concrete block)

NOTA: Todos los fosos y canales para el desagüe del agua de refrigeración así como debajo de la bandeja, debe revestirse con una capa fina de hormigón impermeable.
(NOTE: Every holes and slots for the drainage of coolant water as well as under the bed has to be coated with a fine coat of waterproof concrete.)