

TOS VARNSDORF a.s.

VARNSDORF
TOS



TOS VARNSDORF a.s.
Říční 1774, 407 47 Varnsdorf
Czech Republic

Tel: +420 412 351 203
Fax: +420 412 351 269
E-mail: info@tosvarnsdorf.com
www.tosvarnsdorf.com
www.tosvarnsdorf.eu



www.tosvarnsdorf.com

WHN(Q) 13 CNC

VARNSDORF
TOS

**HORIZONTAL MILLING
AND BORING
MACHINES**




WHN 13 CNC

WHQ 13 CNC

WHN 13 MC

WHQ 13 MC



TOS VARNSDORF a.s.

02/2011

ABOUT COMPANY

www.tosvarnsdorf.com

Company TOS VARNSDORF a.s. situated in Varnsdorf, Czech Republic has a years-lasting tradition in machine tool production. The company was founded, under the name of Arno Plauert Machine Works, as early as 1903 and up to now it grew up into a big engineering company, known with its products all around the world.

The company's manufacturing program is based on the development, manufacture and sale of machine tools, integrated with a wide offer of services, such as:

- training for operators and maintenance workers
- technological studies
- installations of new machines
- warranty and after-warranty (extended) servicing
- spare parts sales
- overhauls and modernizations

In addition, the company provides for the services in the form of outwork offers (Metalworking, Measuring services, Chemical and Heat Treatment of Metals).

High engineering standards of TOS VARNSDORF a. s. products were recognized in 1996 when the company was awarded the ISO 9001 certificate.




PRODUCTION PROGRAM

PRODUCTION OF MACHINE TOOLS

- HORIZONTAL MILLING AND BORING MACHINES
- FLOOR TYPE HORIZONTAL BORING MILLS
- MACHINING CENTRES
- PORTAL TYPE MACHINING CENTRES
- SPECIAL MACHINES
- ACCESSORIES

SERVICES


- TECHNOLOGICAL SUPPORT: TRAINING, TECHNOLOGICAL STUDIES, ETC.
- SPARE PARTS, OVERHAULS AND MODERNIZATIONS
- COOPERATION (METALWORKING, MEASURING SERVICES, CHEMICAL AND HEAT TREATMENT OF METALS)



$> 1 \text{ m}^3 (0.01\text{mm})$

$x > 1 \text{ m}$
 $y > 1 \text{ m}$
 $z > 1 \text{ m}$

CONTENT

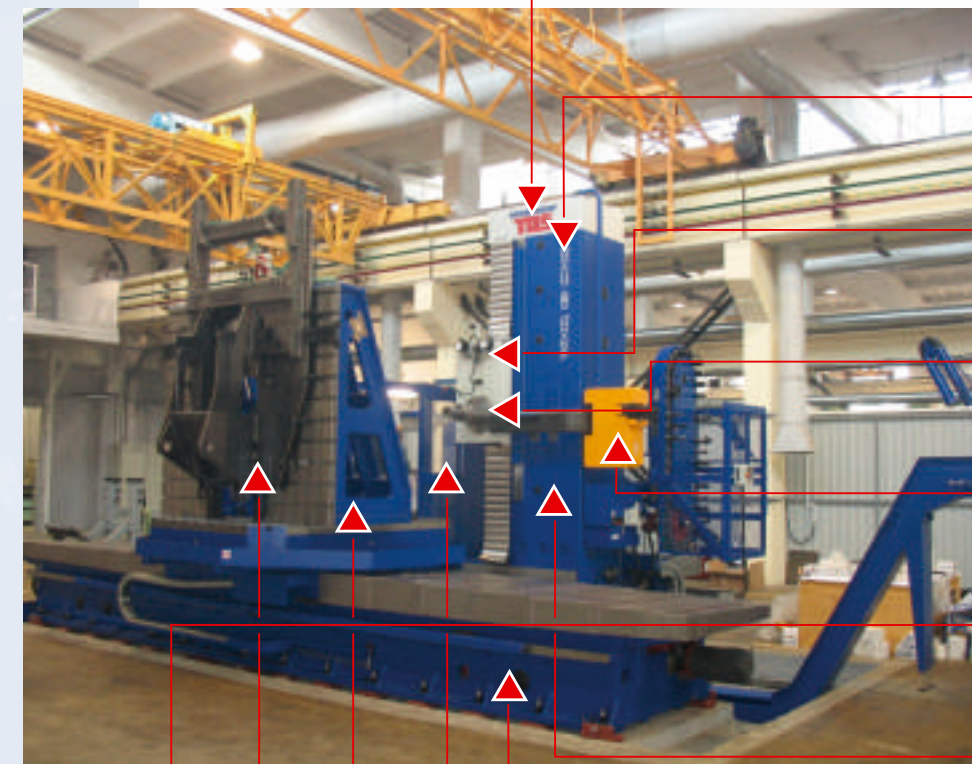

1	ABOUT COMPANY
2	CONTENT
3	HORIZONTAL MILLING AND BORING MACHINE WHN(Q) 13 CNC
4	TECHNICAL PARAMETERS
5/6	HEADSTOCK
7	AUTOMATIC TOOL CHANGE (ATC)
8	AUTOMATIC PALLET CHANGE (APC)
9/10	DESIGN OF MACHINE GROUPS
11/12	MACHINE CONTROL
13/16	OPTIONAL ACCESSORIES
17/18	MACHINE LAYOUT
19/21	TECHNOLOGIES
22	REFERENCES

ABOUT COMPANY

CONTENT

2

HORIZONTAL MILLING AND BORING MACHINE WHN(Q) 13 CNC

www.tosvarnsdorf.com

The WHN(Q) 13 CNC horizontal milling and boring machine is an universal machine tool designed for precise milling, coordinate boring, the boring and cutting of box and plate screws and complicated workpieces with a weight of up to 25,000 kg.

The WHN(Q) 13 CNC is the most successful machine in the company's production range. The first model of this machine was produced in 1969.

The fact that to date more than 2,000 of these machines have been manufactured bears witness to the success of the WHN(Q) 13 CNC.

It stands out mainly thanks to the ratio of its utility properties to its purchase price. Users also appreciate the machine structure, which guarantees high rigidity and reliability, high technical parameters and the wide range and comfort of the technological functions.

X	max. 6,000 mm
Y	max. 3,500 mm
Z	max. 3,000 mm
W	800 mm



NEW DESIGN


For the year 2011 we are prepared to deliver the WHN(Q) 13 CNC machine with new modern and compact design. Deliver from 7/2011.



TECHNICAL PARAMETERS

BASIC SPECIFICATIONS

Headstock with traveling spindle		Headstock R	Headstock N
Spindle diameter	mm	130	130
Spindle taper		ISO 50	
Spindle speed range	R.P.M.	10 - 3,000	10 - 1,500
Main motor power (S1 / S6-60)	kW	37 / 46	
Spindle stroke W	mm	800	800
Headstock with non-traveling spindle			
Spindle taper		ISO 50	
Spindle speed range	R.P.M.	10 - 5,000	
Main motor power (S1)	kW	28	
Column			
Headstock vertical travel Y	mm	2,000; 2,500; 3,000; 3,500	
Column longitudinal travel Z	mm	1,250; 1,600; 2,200; 3,000	
Table			
Workpiece weight max. (S12 / S25)	kg	12,000 / 25,000	
Table clamping surface	mm	1,800 x 1,800; 1,800 x 2,200; 1,800 x 2,500	
Table transverse travel X	mm	2,000; 3,500; 4,000; 5,000; 6,000	
Tilting table			
Workpiece weight max.	kg	16,000	
Tilting range		0 - 5°	
Automatic pallet change			
Pallet clamping surface	mm	1,800 x 1,800; 1,800 x 2,200	
Workpiece weight max.	kg	16,000	
Number of pallet in system		2	
Time of pallet change	sec	90	
Feeds			
Feed range - X, Y, Z, W	mm.min ⁻¹	4 - 5,000	
- B	min ⁻¹	0.003 - 1.5	
Rapid traverse - Y, Z, W	mm.min ⁻¹	10,000	
Rapid traverse - X = 2,000; 3,500 (S12)	mm.min ⁻¹	10,000	
Rapid traverse - X = 2,000; 3,500 (S25)	mm.min ⁻¹	8,000	
Rapid traverse - X = 4,000; 5,000; 6,000	mm.min ⁻¹	8,000	
Rapid traverse - B S12 / S25	min ⁻¹	2 / 1.5	

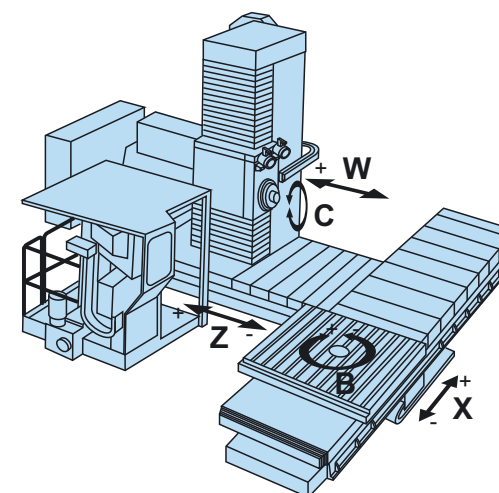




THE HEADSTOCK

contains all the spindle bearings and the spindle driving mechanism as well as the ones for the longitudinal travel of the live spindle (W-axis).

The main housing of spindle heads consists of an assembly of hollow and work spindles. The hollow spindle (quill) is housed in precision spindle oblique-contact ball bearings in a multiple pre-stressed design.



The work spindle is nitrided, hardened and mounted to slide with a minimum clearance in the hollow spindle.

Clamping of tools is lever operated; the clamping force is created by plate springs; hydraulically controlled process of releasing. Also, the customer may request the tool clamping in the BIG-PLUS system. During the automatic tool change, the taper is cleaned with pressure air.

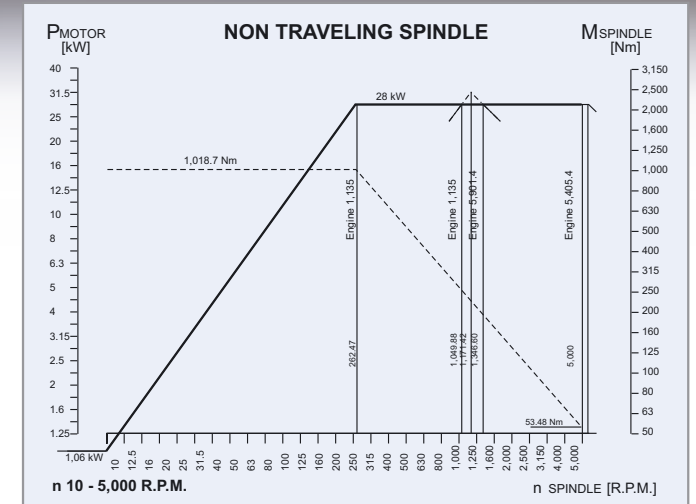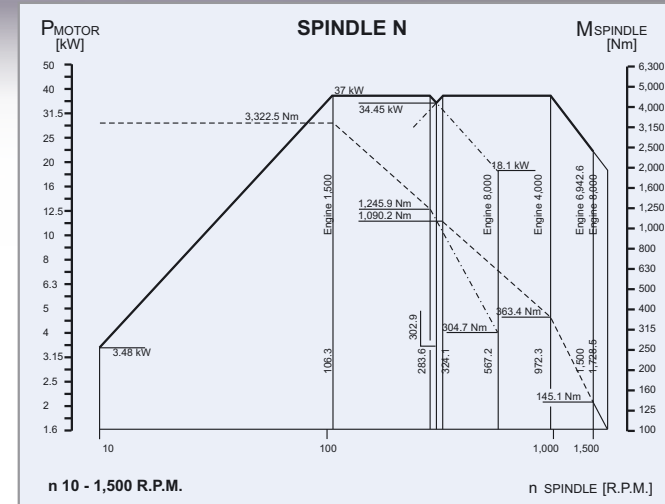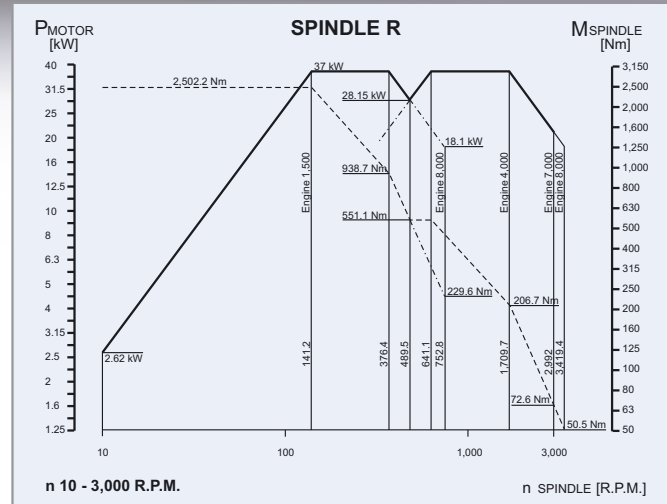


WHN(Q) 13 CNC

SPINDLE TYPE		R	N
Main motor power S1/S6-60	kW	37 / 46	37 / 46
Max. spindle torque S1/S6-60	Nm	2,502 / 3,111	3,322 / 4,132
NON TRAVELING SPINDLE			
Main motor power S1/S6-60	kW	28 / 35	
Spindle torque S1/S6-60	Nm	1,018 / 1,265	

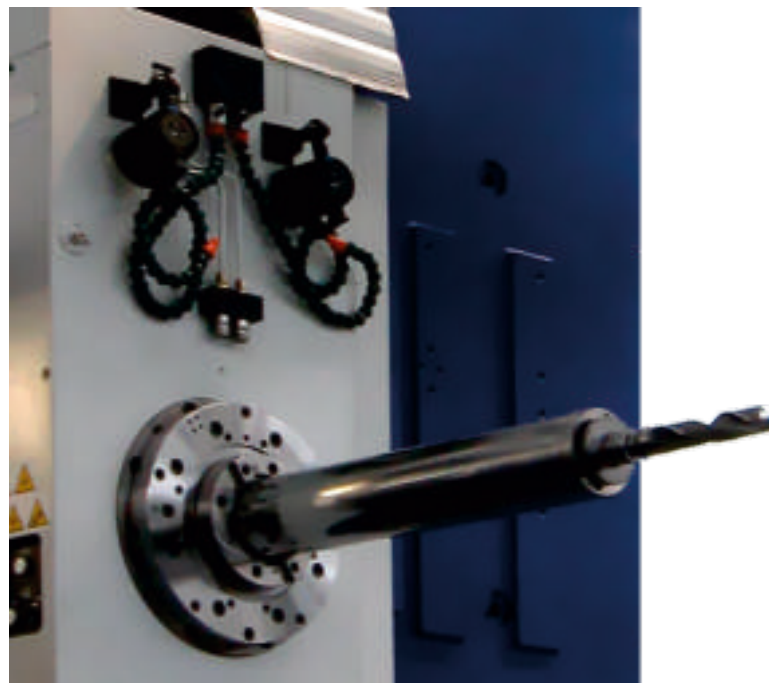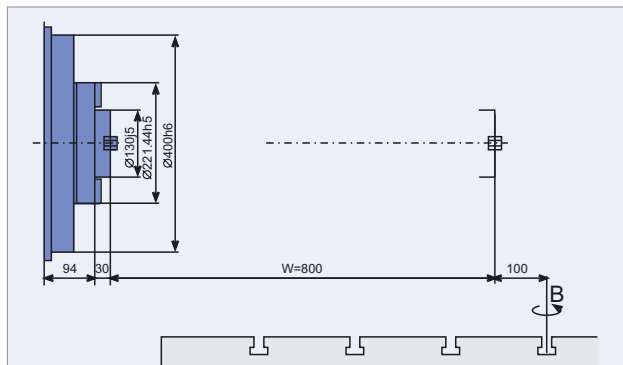


THE SPINDLE PULLOUT

is accomplished using an independent servo-drive. Equipment for sensing the revolutions of the spindle and for measuring the spindle pullout using a HEIDENHAIN electrical-optical linear measuring scale is located on the headstock tail.

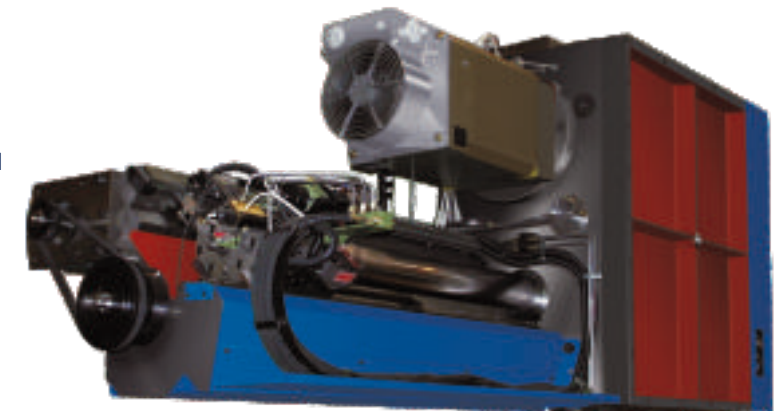

THE SPINDLE DRIVE

has been resolved in two mechanical rows banked automatically by hydraulic feeding attachments.

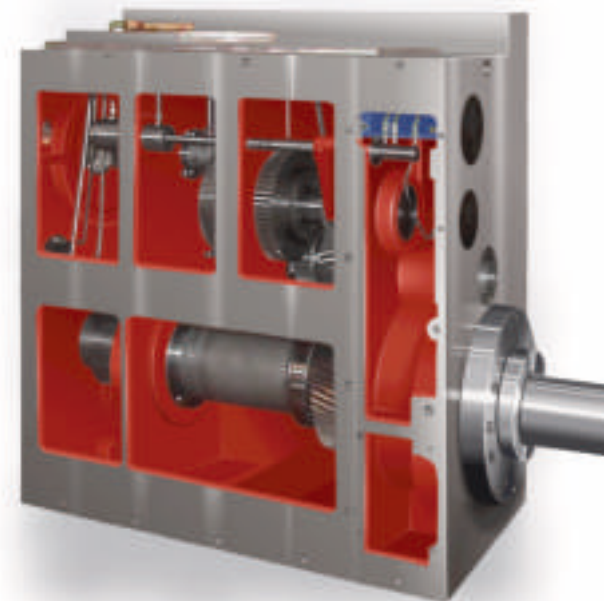

THE HEADSTOCK „15“ - SPINDLE DIAMETER 150 MM

Request on headstock „15" with spindle diameter 150 mm is possible discussed with machine tool manufacturer. Deliver from 7/2011.

BASIC TECHNICAL PARAMETERS

Spindle diameter	mm	150
Spindle speed range	R.P.M.	10 - 3,000
Main motor power S1	kW	46
Max. spindle torque S1	Nm	3,100
Spindle stroke W	mm	900

AUTOMATIC TOOL CHANGE (ATC)


www.tosvarnsdorf.com

ATC consists of a chain or loop type tool magazine and horizontally traversing manipulator with rotating two-arm hand, manipulator is fitted to the back of the column (basic design for 40 or 60 tools). The ATC equipment adapted with respect to the tool standard can be as follows:
CSN 22 0432
CSN 22 0434
DIN 69871
BT 50 MAS 403-1982
CAT ANSI/ASME B5.50-1985


CHAIN MAGAZINE



LOOP MAGAZINE

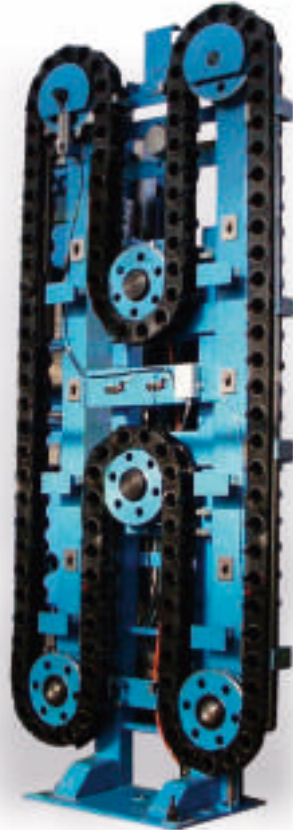

TOOL MANIPULATOR

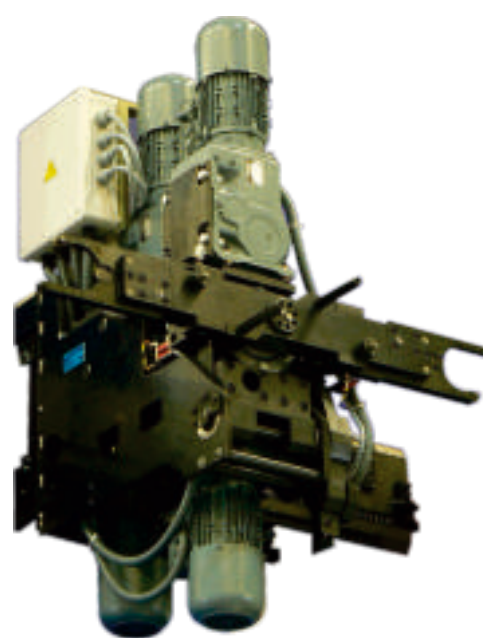


AVN (ATC) CONTROL PANEL



AUTOMATIC PALLET CHANGE (APC)

Concept of the pallet change system is based on automatic change of production pallets between pallet stations, which are equipped with pallet changing mechanism, and a pallet clamping base on the machine saddle. Pallet is arrested on the clamping base by Hirths tooth system (center rings and base of the pallets) and it is clamped by cup springs, unclamping of pallet is hydraulic. Dimensions of pallet and T-slots are given with ISO standard. When two pallet system is used, pallets are changed directly between stations and the pallet base.

Pallet clamping surface	mm	1,800 x 1,800; 1,800 x 2,200
Workpiece weight max.	kg	16,000
Size of T-slots	mm	22H8
Number of pallet in system	pc	2
Time of pallet change	sec	90

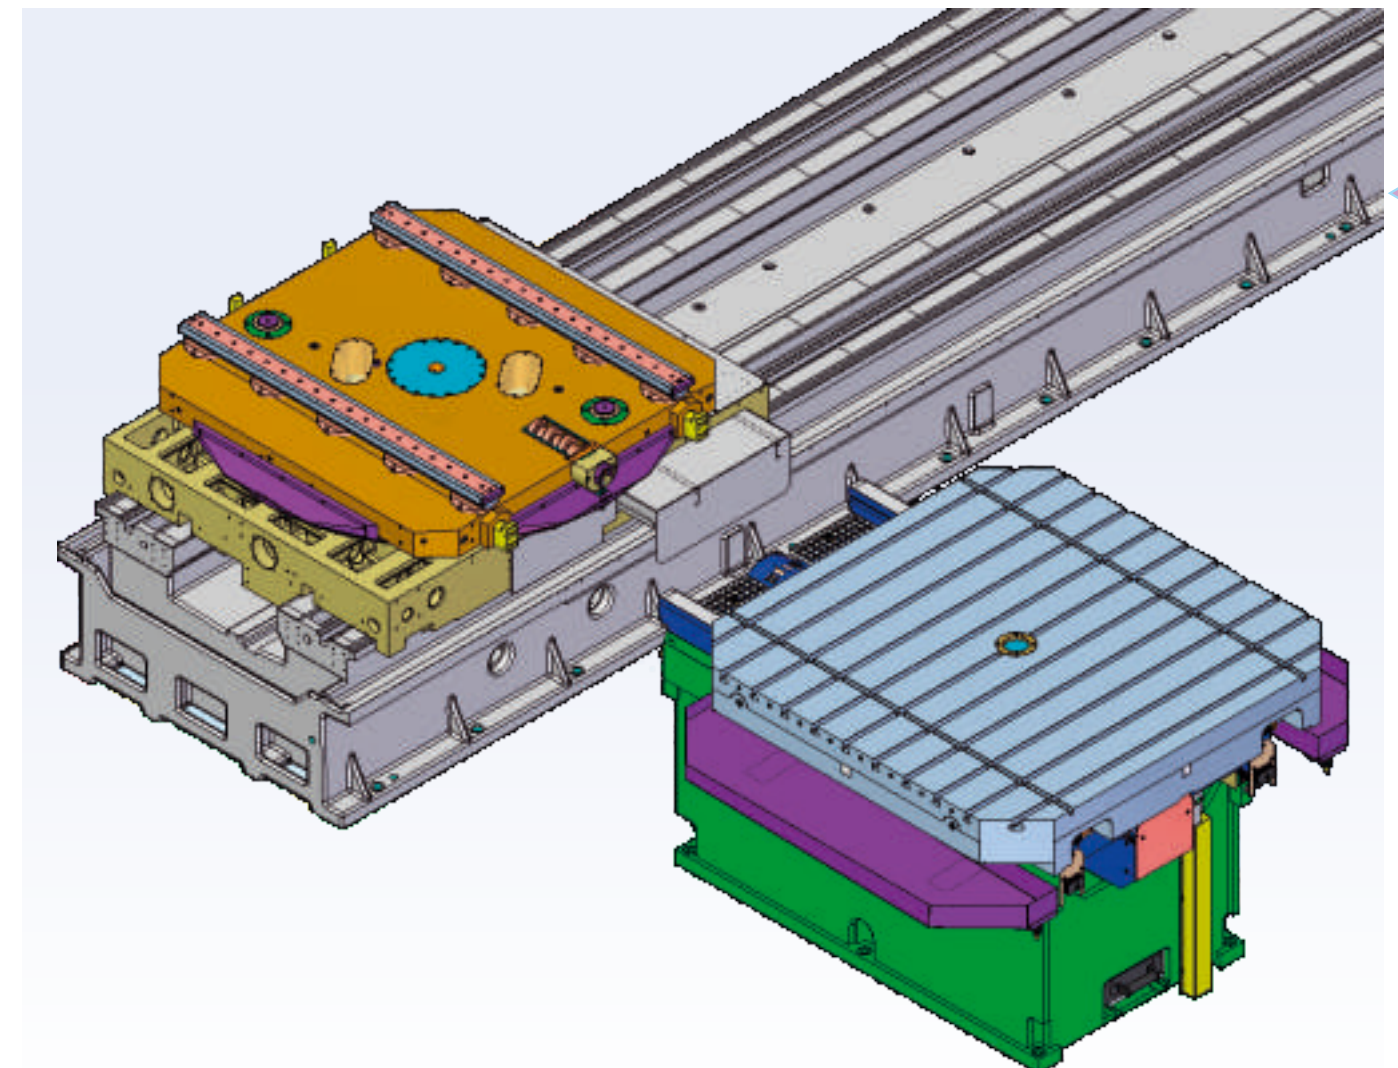

Quantity of pockets in magazine		40, 60, 80*, 120*
Pitch of pockets in magazine	mm	130
Tool dia max		
- with fully loaded magazine	mm	125
- with free neighbouring places	mm	320
Tool length max.	mm	500
Tool weight max.	kg	25
Total tool change time	sec	20


* stationary magazine beside column

DESIGN OF MAIN MACHINE GROUPS

www.tosvarnsdorf.com

COLUMN

The structure and ribbing of the column mouldings guarantee their high rigidity.

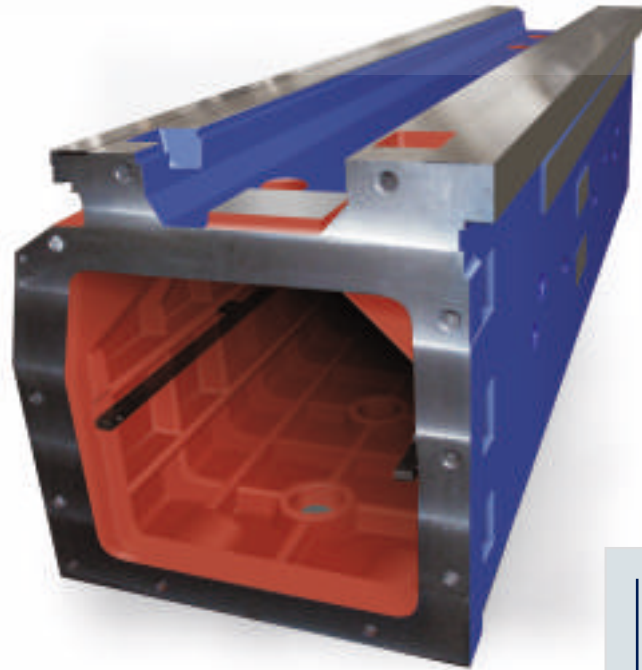


THE FEED DRIVES

are equipped with digitally controlled AC servo-drives from Siemens. There is a clearance-free gearing in between the servo-drive and the round-headed screw in order to achieve increased shearing force.



THE GUIDE WAYS

Main guide ways for the longitudinal and cross beds and the columns are equipped with hardened and grinded steel lining strips. The mating face of the column slide, the table slide and the lower cylindrical surface of the table are covered in a layer of plastic with a low friction coefficient.

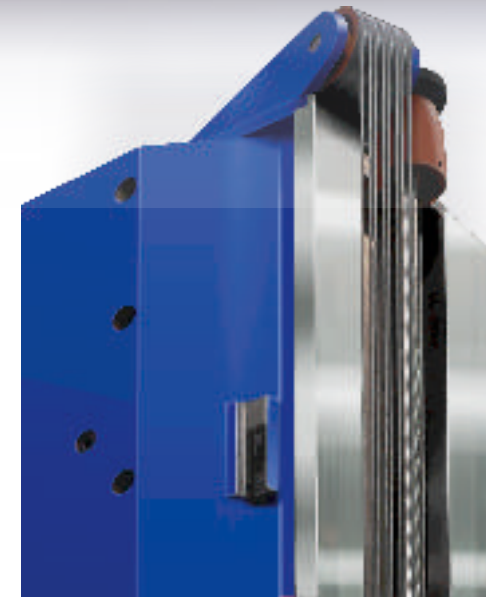

HEADSTOCK COMPENSATION

The weight of headstock is compensated by opposite plumb fixed over pulleys on set of ropes in column cavity.



THE ELECTRIC OUTFIT

The electrical installation is mostly wired into an independent electrical box. It contains a basic control system module, components controlling the servo- and spindle-drives plus other electrical elements supplied by leading specialized companies. The electrical box is cooled by a unit integrated into the box door.



THE OPERATOR PLATFORM

The WHN(Q) 13 CNC machine in standard execution is equipped with operator platform upon which the central control panel is placed. The operator platform is autonomously convertible-vertically and parallel with spindle axis as well.



ROTATION CLAMPING TABLE

Table rotation is realized as by CNC controlled positioning (one pinion drive), or as connected controlled (2 pinion drive controlled by Master - Slave system). It is in its center equipped by rotation sensor, which gives the possibility of automatic table positioning with increment of 0,001°.



HYDRO-AGGREGATE

Guideways of X, Y, Z and B axes are lubricated automatically by means of oil metering unit placed together with hydro-aggregate on the column saddle.



MACHINE CONTROL

www.tosvarnsdorf.com

**THE WHN(Q) 13 CNC MACHINE IS NORMALLY CONTROLLED
BY THE HEIDENHAIN iTNC 530, SINUMERIK 840 D OR FANUC 31i CONTROL SYSTEM**

All types of control systems in basic configuration consists of:

- basic electronic module
- color LCD display unit
- operational panel with keyboard
- portable auxiliary control panel with an electronic handwheel.

In addition, control system functions and equipment may be equipped with:

- measuring touch probes

- network interface allowing remote diagnostics

All offered systems provide full control of 5 machine axes (**X, Y, Z, W** and **B**) plus spindle rotation (**C**).

An independent digital AC servo-drives applied with all convertible groups allow for simultaneous interpolation:

- linear - upto 5 axes
- circular
- helical

Option: continuously controlled **B** axis

**CONTROL PANEL
OF SINUMERIK 840 D
CONTROL SYSTEM**



**CONTROL PANEL
OF HEIDENHAIN iTNC 530
CONTROL SYSTEM**



**CONTROL PANEL
OF FANUC 31i
CONTROL SYSTEM**



**PORTABLE
CONTROL PANEL
SINUMERIK**



**PORTABLE
CONTROL PANEL HEIDENHAIN
(OPTION TYPE HR 520)**



WORKPIECE AND TOOL PROBES

WE DELIVER THE FOLLOWING PROBES AS STANDARD:

MEASURING TOOL PROBE for the system:		
iTNC 530	HEIDENHAIN TT 140	measuring touch probe with cable transport
iTNC or Sinumerik 840D	RENISHAW TS 27 R	measuring touch probe with cable transport
MEASURING WORKPIECE PROBE for the system:		
iTNC 530	HEIDENHAIN TS 220	measuring touch probe with cable transport
	HEID. TS 640 + SE 640	measuring touch probe with optical transport
TNC or Sinumerik 840D	RENISHAW OMP 60 - set	measuring touch probe with optical transport
	RENISHAW RMP 60 - set	measuring touch probe with wireless transport
	M+H 20.41 Multi	measuring touch probe with wireless transport

TOOL CONTROL PROBE



MEASURING TOUCH PROBE




WE ALSO OFFER A SYSTEM OF SERVICES FOR THE PERMANENT SUPPORT OF CUSTOMERS:

TOSmessage

- ensures communication between the machine's control system and the customer's mobile phone. The customer is informed about the predefined statuses of the machine, e.g. the completion of an automatic cycle or possibly program interruption.

TOSwide

- the remote diagnostic system allows our service engineer to obtain required data about the status of the machine necessary to specify possible diagnostic messages about the non-standard condition of the machine's control system.

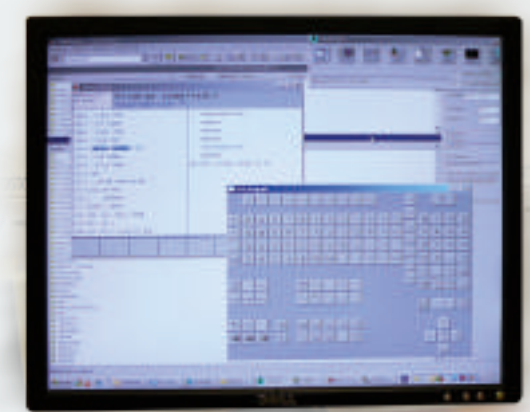

MILLING HEADS

HF 50



The HF 50 and HUR 50 heads are used for machining the surfaces that are oriented in the basic direction (also generally) with regard to the orthogonal coordinate system of the machine.

HUR 50




HUI 50




The HUI 50 head is automatically indexed on both the planes with an increment of 2.5°, providing higher efficiency during the turning of the head spindle with regard to the orthogonal coordinate system of the machine.

UFP 50-13
universal milling head

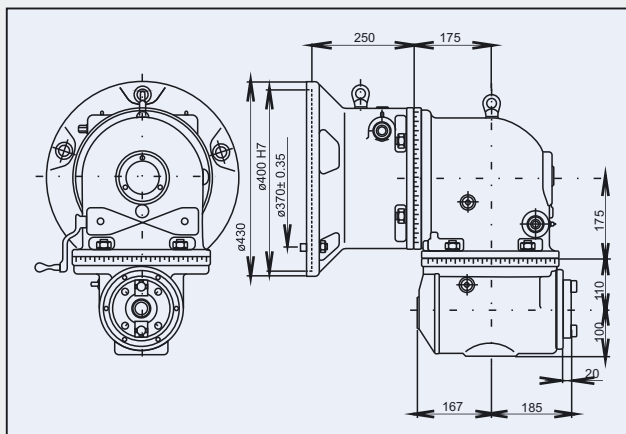

FP 50-13
vertical milling head

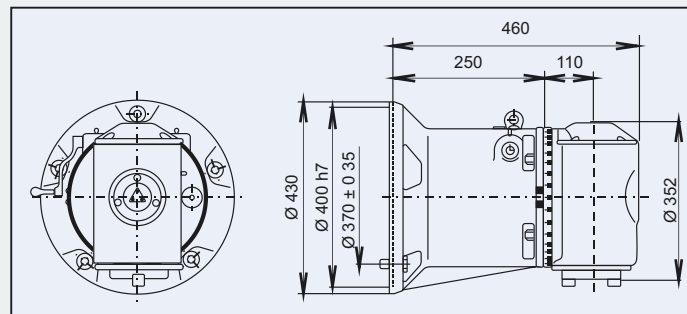

FASTENING OF MILLING HEADS

MANUAL FASTENING

Manual fastening of the head on the machine is carried out by means of a lifting device.

HALF-AUTOMATIC FASTENING

The head is fixed to the machine also in a half-automatic way from an auxiliary rack. The auxiliary rack is manually locked on hinged arms on the table.




AUTOMATIC FASTENING

AUTOMATIC FASTENING
Automatic fastening of the head (facing head) on the machine is carried out by means of an accessory magazine. Its execution is subject to prior consultation with the manufacturer.

FACING HEAD

Facing head LD 650 (1) or D'Andrea (2) are used for demanding technological operations with the possibility of continuous CNC control of the slide position.

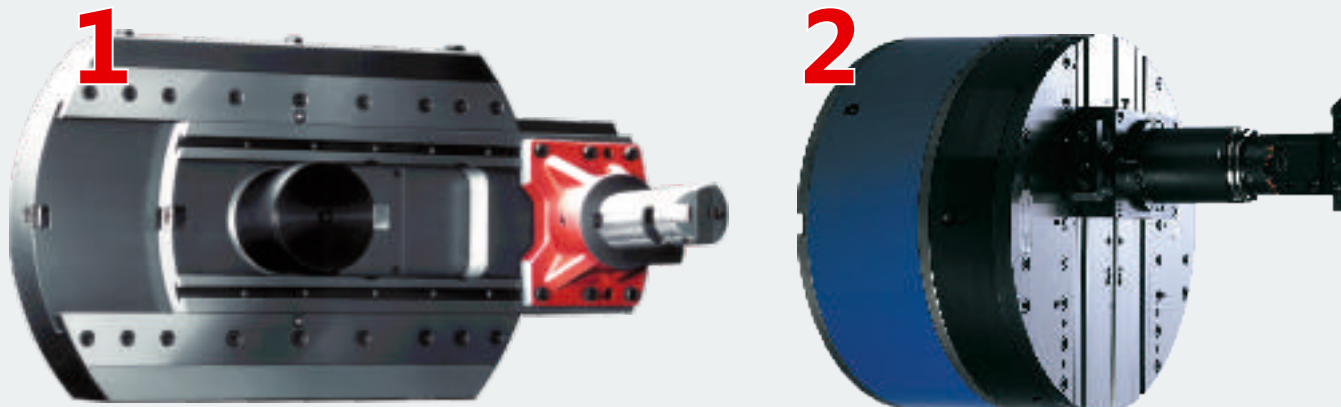


OPTIONAL ACCESSORIES

www.tosvarnsdorf.com

TOOL COOLING DEVICE

Customer may choose either CHZ 13 outer tool cooling kit or CHOV 13 through spindle tool cooling kit which brings coolant to the cutting edge through outsider nozzles as well. Possible choose is 10, 20, 30 or 40 bar.

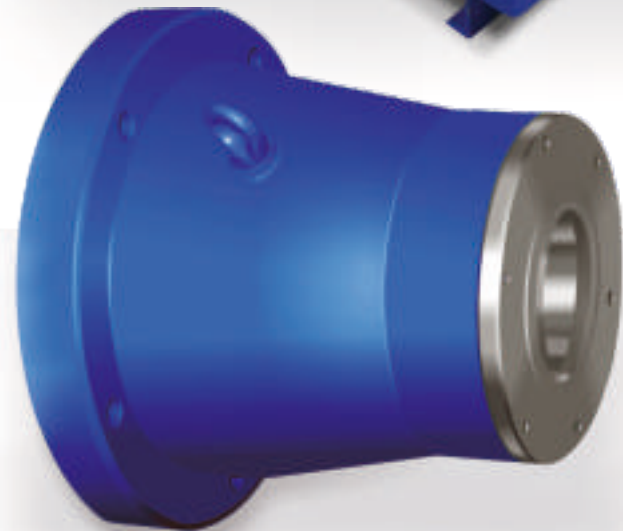

SPINDLE SUPPORT

The spindle support ensures a significant increase in the rigidity of the work spindle in the case of larger pullouts.

CLAMPING ANGLE PLATES

Clamping angle plates are supplied in the following sizes as standard: 800; 950; 1,120; 1,450; 1,620; 2,000; 2,500; 3,000; 3,500 mm.




CLAMPING CUBES

UK 500; UK 1000; UK 2000; UK 2500




TILTING TABLE

Tilting table is possible to use for workpiece clamping and positioning, in axes **B** and **X** is controlled by control system of the machine, tilting is made manually.

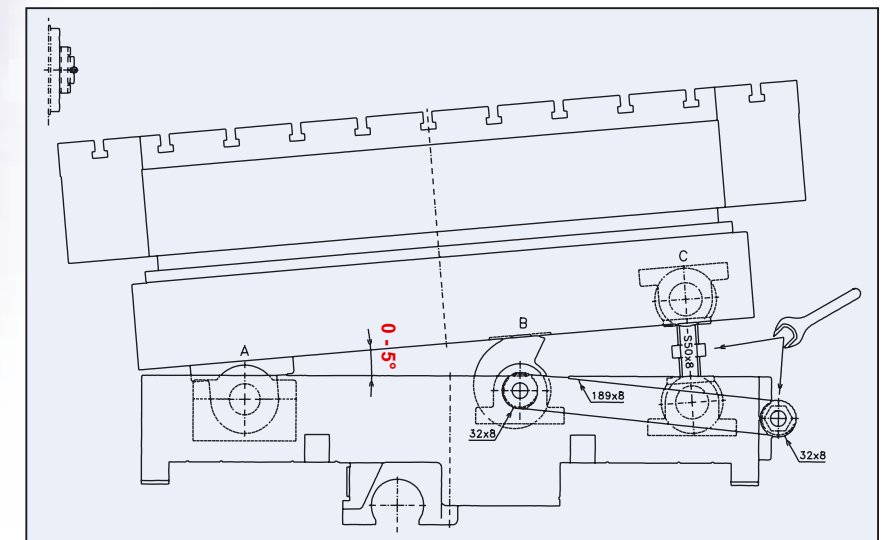

CHIP CONVEYOR

The length of a chip conveyor and its discharge height can be accommodated to user's needs.

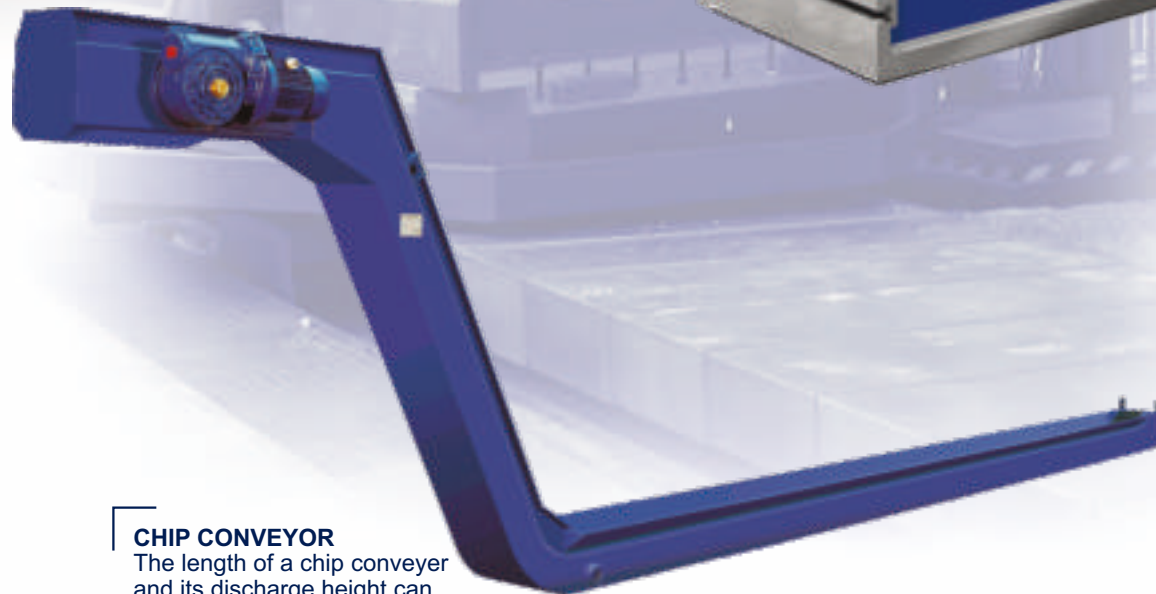


MACHINE LAYOUT

www.tosvarnsdorf.com


DIMENSIONS AND WEIGHTS

Coordinate travel (mm)		Dimension (mm)	
X	2,000	5,630	a
	3,500	7,125	
	4,000	7,650	
	5,000	8,650	
	6,000	9,750	
Y	2,000	4,780	b
	2,500	5,280	
	3,000	5,780	
	3,500	6,280	
Z	1,250	6,807	c
	1,600	7,307	
	2,200	7,807	
	3,000	8,807	

Machine weight (kg)		
X	Y	Table dimensions (mm)
3,500	2,500	1,800 x 2,200
WHN 13 CNC		WHQ 13 CNC
36,850		38,650

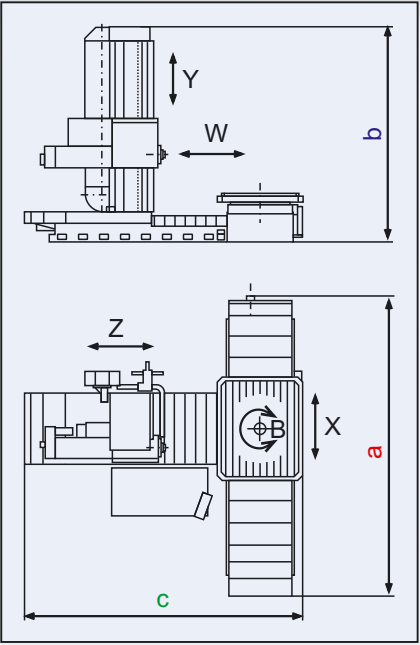

MACHINE LAYOUT

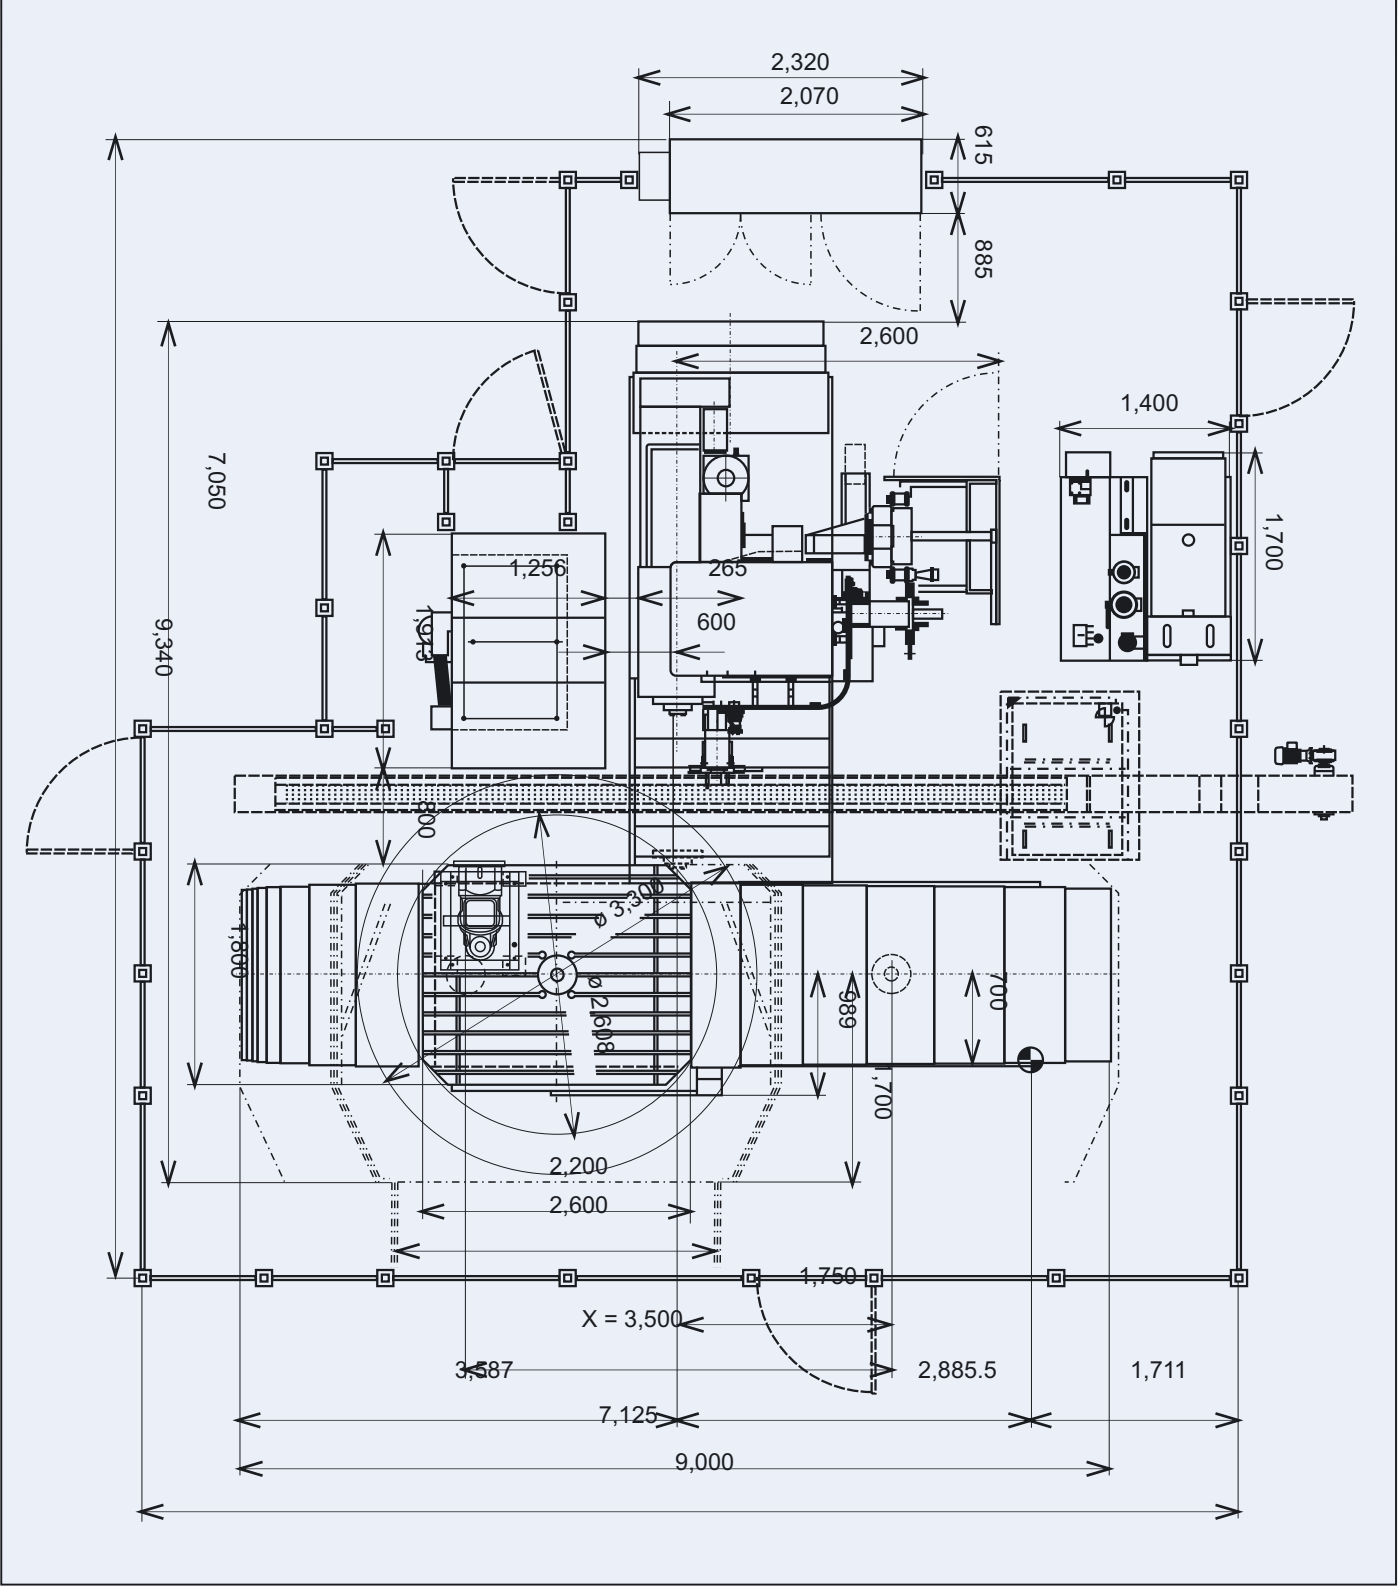

MACHINE COVERS

On the customer's request we deliver following types of covers:

COMPLETE COVERING

the top quality design without any residual risks



KVR CABIN

protective covers for working space



MOBILE / MOVABLE

protective partitions



C-COVER

compact and technically advanced design



TECHNOLOGIES

www.tosvarnsdorf.com

MILLING AND BORING OF A CARRIAGES



MILLING OF A CRANE ARM



MILLING OF A VALVE FACE



MILLING OF A HEAT EXCHANGER



DOUBLE-SIDED MILLING OF A CRANE ARM



MILLING OF A CARRIAGE AXLE



DRILLING OF A TUBE PLATE



MILLING OF A FRONT ROLL FOR A ROADROLLER



PROPELLER HUB FOR A WIND-POWER STATION



MILLING OF A STEAM TURBINE STATOR



MILLING OF A DEEP WELL PUMP CRANKSHAFT IN ONE PIECE



MACHINING OF A GEARBOX PART FOR A LOGGING MACHINE



TECHNOLOGIES

www.tosvarnsdorf.com

MILLING OF A HOLE INTRADOS



MILLING OF AN INJECTION MOLD



MILLING OF A MOULD



MILLING OF A MOULD PART



MILLING OF A FLANGE FOR PIPELINE



MILLING OF A TOOL FOR A FORM STAMPING



UPON THE CUSTOMER'S REQUEST, IT IS POSSIBLE TO EQUIP THE MACHINE WITH ADDITIONAL DEVICE OR PROCES ACCESSORIES.



Data and features in the present catalogue are not binding. The producer reserves the right to alter them without advance notice at any time.

REFERENCES

MILLING OF A PANEL HONEYCOMB STRUCTURE FOR THE SOLLAR CELLS



INTERPOLATION TURNING OF FLANGE VALVE



MORE TECHNOLOGIES YOU CAN FIND ON www.tosvarnsdorf.cz/en/technologies/



2,251

STATISTICS OF SOLD WHN(Q) 13 OF ALL TYPES: 1969 – JANUARY 2011

	Germany	376		China	33		Australia	3
	Czechoslovakia	252		Bulgaria	32		Belarus	3
	Italy	194		Belgium	31		Portugal	3
	Canada	156		Switzerland	29		Singapore	3
	Czech Republic	115		Iran	21		Syria	3
	France	115		GDR	20		Afghanistan	2
	Austria	90		Hungary	20		Chile	2
	Poland	69		Russia	20		Egypt	2
	Finland	64		Slovakia	16		Iraq	2
	Soviet Union	62		Japan	14		Kazakhstan	2
	Romania	58		Norway	13		Mexico	2
	United States of America	57		Argentina	10		Grece	1
	Spain	48		Croatia	10		Iceland	1
	Slovenia	47		Turkey	10		Kuwait	1
	Sweden	47		Brazil	7		Luxembourg	1
	Yugoslavia	46		United Kingdom	6		Saudi Arabia	1
	Netherlands	41		Estonia	5		South Korea	1
	Denmark	37		United Arab Emirates	5		Sudan	1
	India	36		Thailand	4		Venezuela	1

Total 2,251