

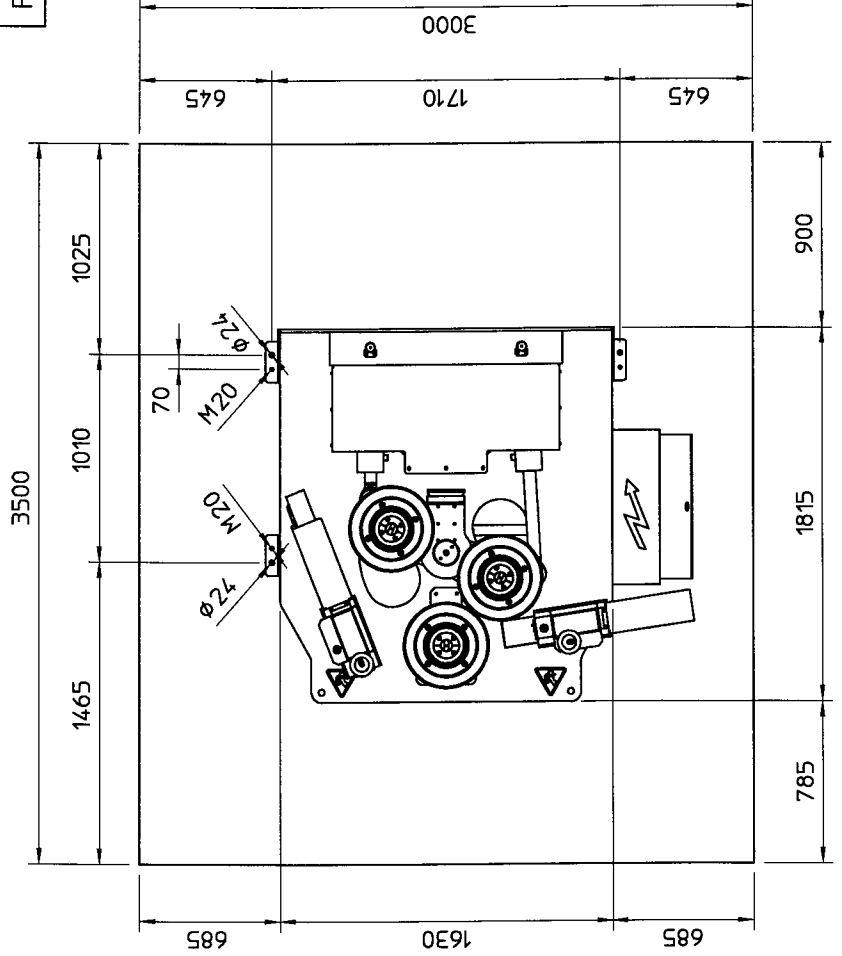


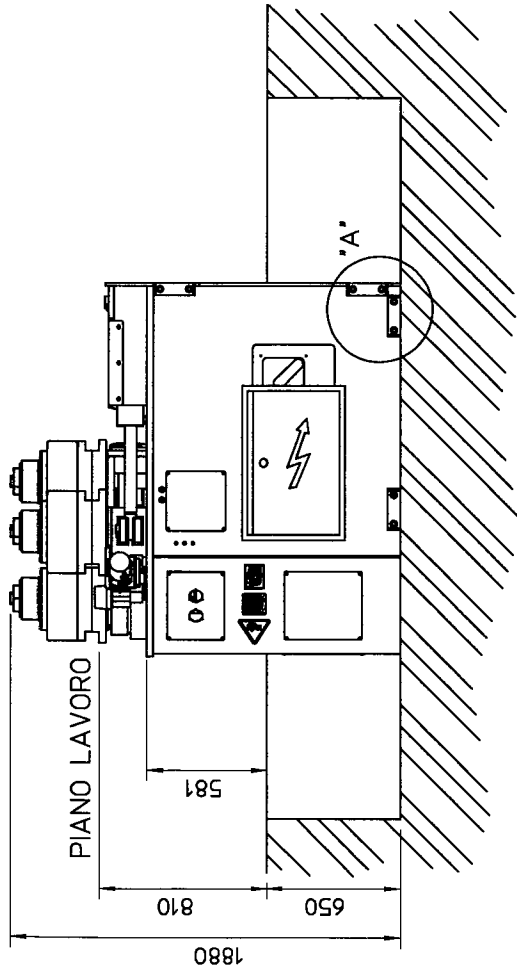

N°4 Viti STEI M20x100
 N°4 Grub screws M20x100
 N°8 Dadi M20
 N°8 M20 Nuts

N°4 Tiranti Fischer RGM 20x260 + RM 20
 N°4 M20 balls Fischer RGM 20x260 + RM 20

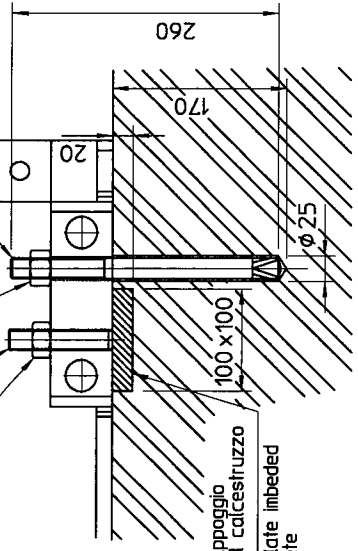

Piattello di appoggio
 annegato nel calcestruzzo
 Support plate imbedded
 in concrete

Particolare A Scala 1:5

- Grigliati o sistemi di copertura e loro fissaggio, non compresi nella fornitura
 - Wire-nettings or any other covering system and their fixing, are not included in the supply

La macchina dev'essere solidamente ancorata su fondazione in calcestruzzo adeguata al peso. Per ulteriori informazioni sul sistema di fissaggio si rimanda al catalogo 'Fischer'.

The machine has to be layed and anchored on concrete foundations adaguated to the machine weight. To have more information about the pinching system, please see the catalogue 'Fischer'.

NB: Max carico specifico sul pavimento : ~2.5 kg/cm2
 Max specific load on the floor: ~2.5 kg/cm2

CLIENTE				MODIFICHE	
Piano di Fondazione - Piegaprofilati (Foundation Drawing - Angle Bending)					
RCMI 130					
	Data	Firma	Scala	DISEGNO	Tav.
	27.07.09	SF		018.130.000.031	