



TRUMPF CNC-Sheet Metal Machining Centre

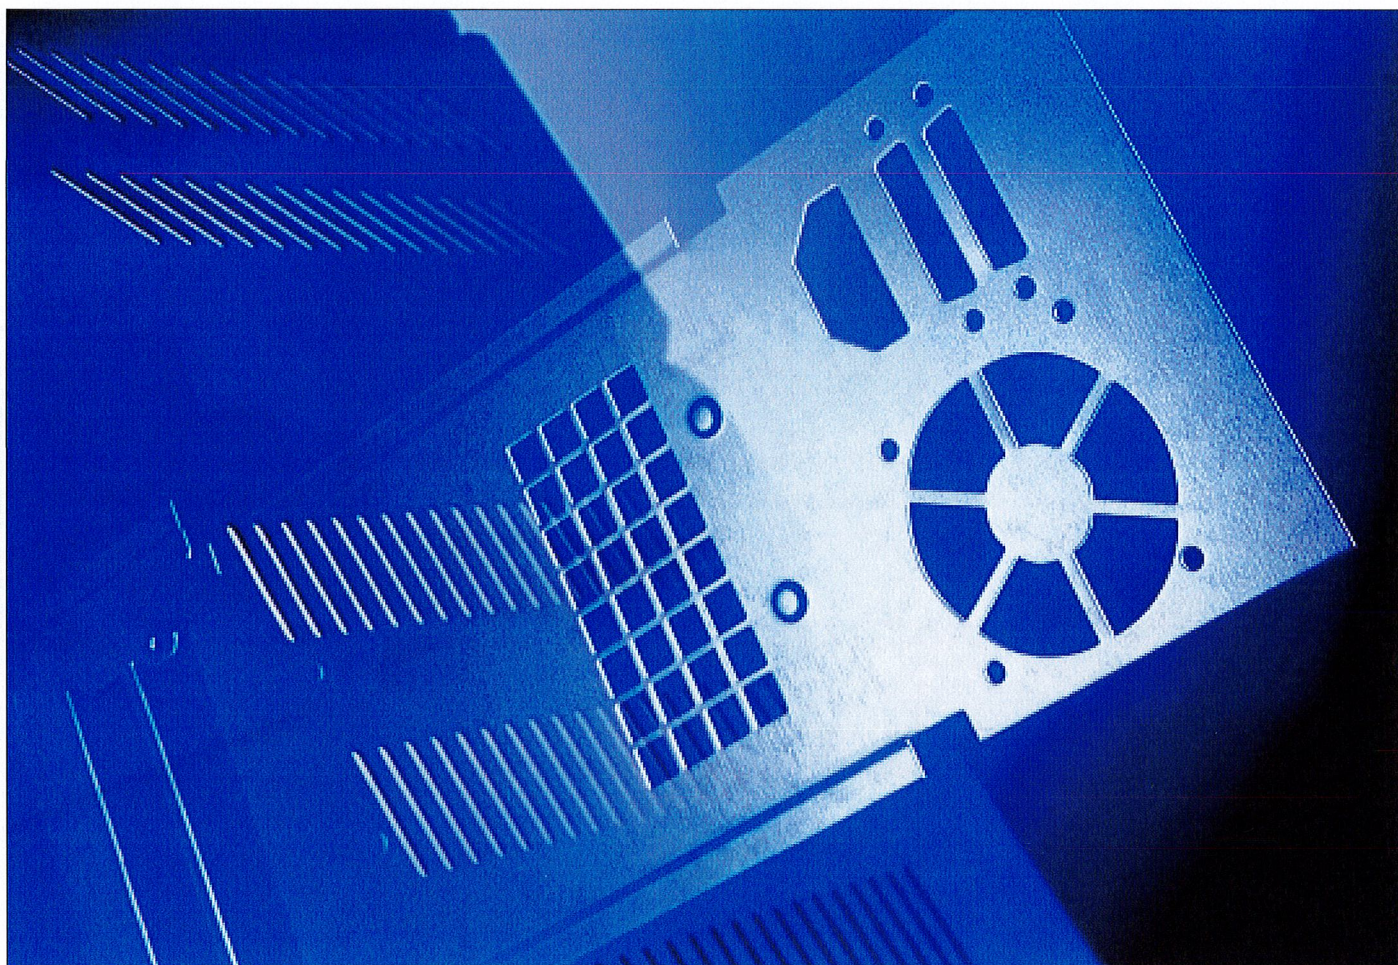


Punching, Nibbling
and Forming
with Rotation
of all Tools

**TRUMATIC 500
ROTATION**

TRUMPF




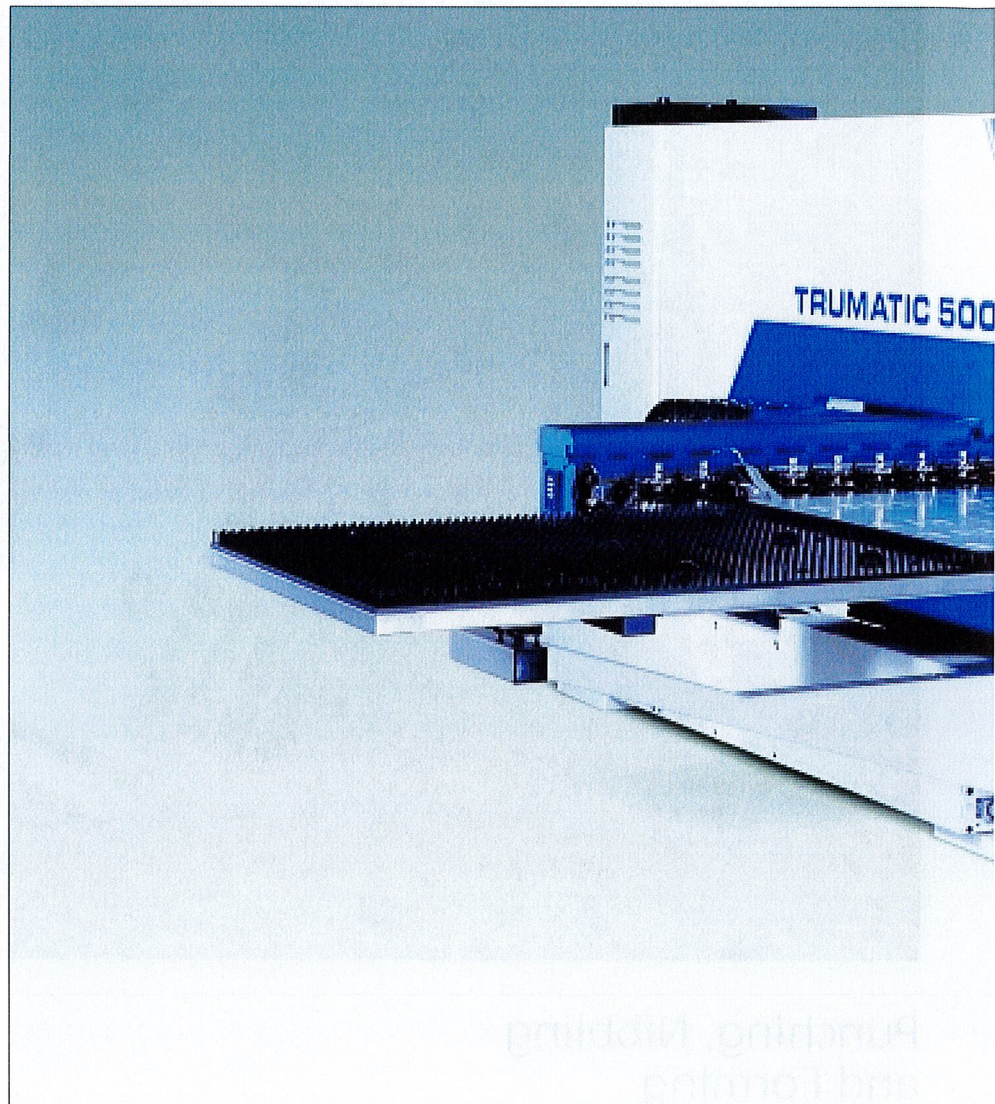

Today's markets demand a variety of new products that require short development cycles and typically have a limited product life. The emergence of such markets has led to the development of new production strategies. One such strategy is Just-In-Time manufacturing – the economic production of small batch sizes.

The challenge of manufacturing today is to produce with a combination of high productivity and flexibility. More and more engineers are finding that a CNC sheet metal machining centre for punching, with contouring and forming abilities, enables them to do this economically. The TRUMATIC 500 ROTATION meets these challenges.

In every respect the TRUMATIC 500 ROTATION is today's machine, offering the fastest production times, with short set-up times and high component quality. Its wide range of applications makes it the ideal machine for the present and the future.

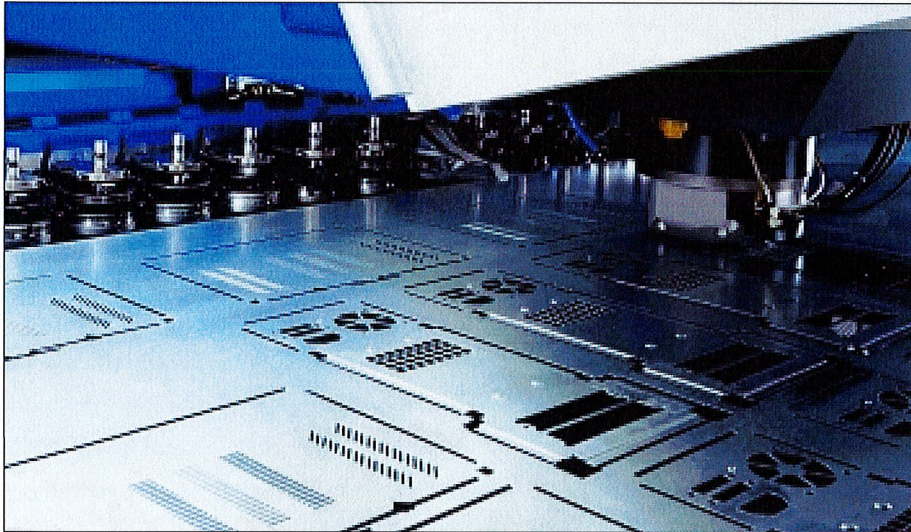


Intelligent head

- Clutch and brake-free electro-hydraulic ram drive
- Automatically minimised punch force
- Programmable stroke speed
- Automatic tool change and hydraulic tool clamping
- Maximum tool support and tool life
- Automatic tool length compensation
- Greatest process safety


TRUMPF Softpunch® for quietest operation

- Program-controlled ramp function
- Tools can be activated individually

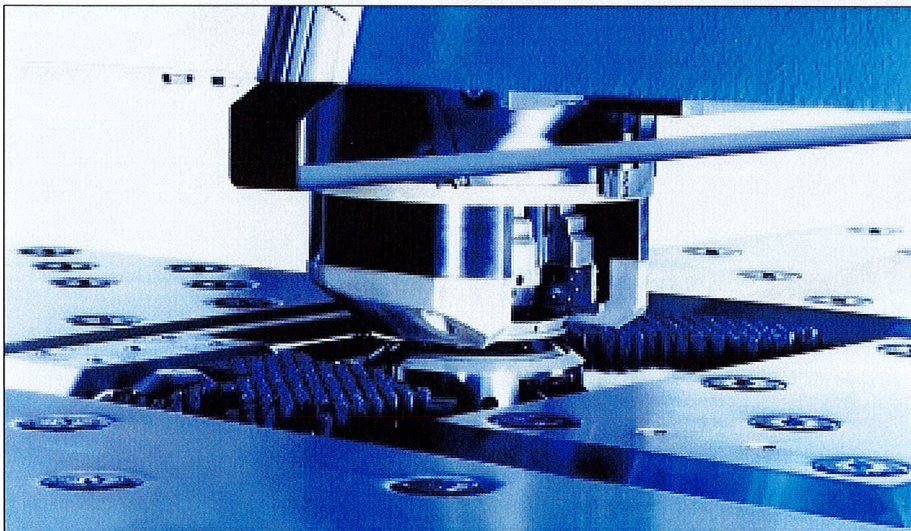

360° Rotation of *all* tools *with no* tool size limitation

- Reduced tooling costs
- Reduced setting time
- Higher productivity
- Greater flexibility
- Greater economy

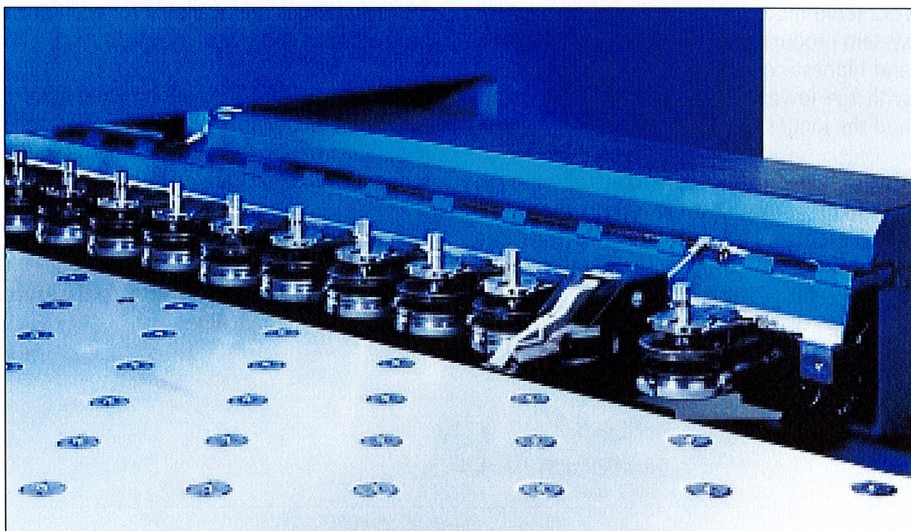

Easy to set linear tool magazine

- 18 magazine locations for any mix of tools and Multitool®
- Max. 76.2 mm diameter in *all* locations
- Free choice of tool location
- Cartridge change simple, positive and safe
- Quick clamp setting and precise location
- Minimum clamp dead range
- Fastest set-up time
- Easy access for efficient operation
- Automatic verification of tool and clamp position



TRUMATIC 500 ROTATION: Harmony of Function and Design

A new design concept has produced a more compact, yet even sturdier C frame.

Through its simplicity, the integration of workpiece positioning and tool changing within a coordinate system of low mass and high rigidity yields considerable operating and service benefits.

A.C. servo-motors and a rack and pinion drive system produce the highest operating speed and highest component accuracy, combined with the lowest maintenance requirements and the longest precision life.

Through programmable control of both punching speed and stroke length, the intelligent electro-hydraulic ram within the punching head has been developed by TRUMPF into a virtual 3rd axis.

18 tool stations are available for economical production.

Head rotation offers yet another axis of operation, allowing the rotation of all tools, including forming tools and Multitools®. Each tool set can be exchanged within seconds.

The graphic programmable 32 bit control, TRUMAGRAPH CC 220 S, is fast and powerful and manages all operating and service functions of the machine.

TRUMPF punching tools – a versatile system

TRUMPF Multitool®

- 2, 4, 6, 12 tools within *one* tool
- Higher tool storage capacity
- Reduced tool change time
- Fewer tool sets

TRUMPF Forming tools


- Rigid hydraulic tool clamping
- Programmable downward feed
- Multiple uses (tapping, louversing, rimming etc.)

TRUMPF parting and Multicut tool

- Faster profiling and higher quality through rotation


TRUMPF Whispartool®

- Environmentally friendly through reduced noise levels

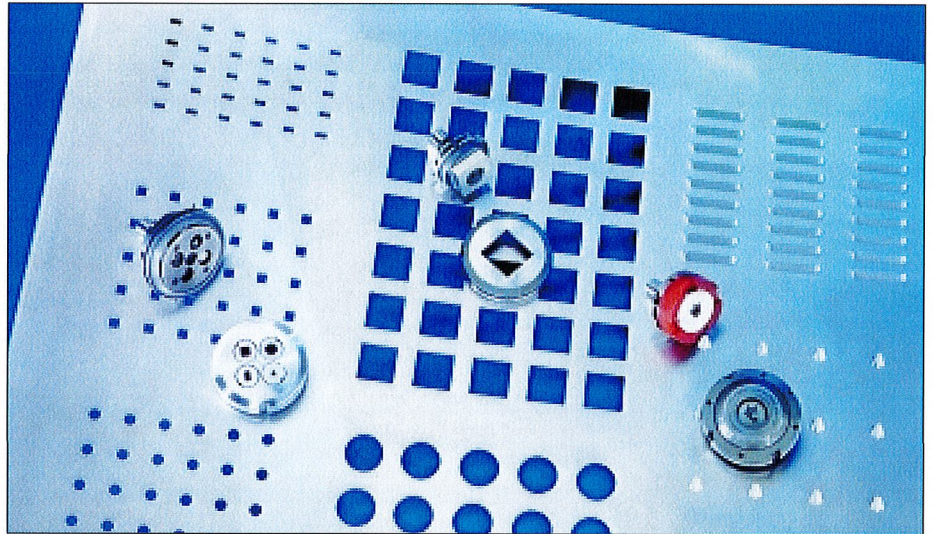

Automatic removal of small parts and scrap

- Pneumatic chute 500 mm x 500 mm
- Chute for small parts max. 80 mm x 50 mm
- Program-controlled removal of small parts and scrap
- Direct discharge into bins
- Vacuum assisted punch slug removal

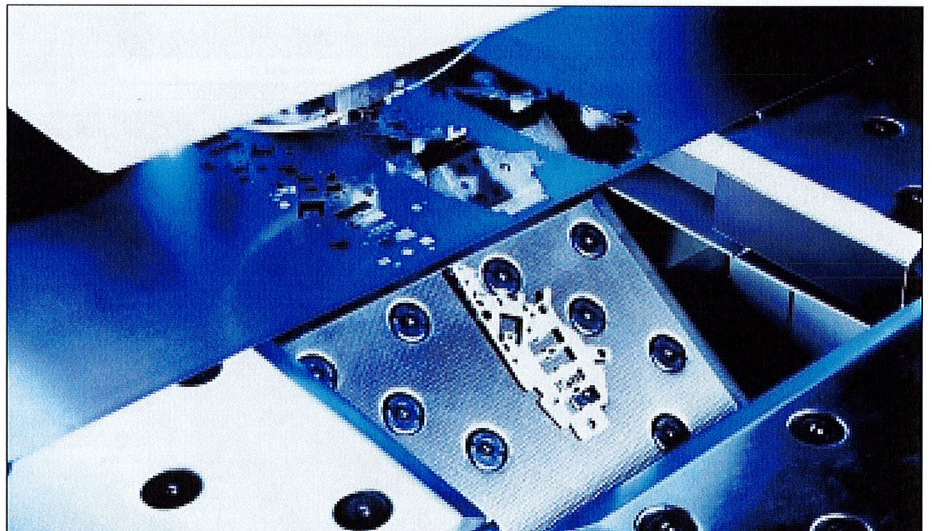


TRUMALIFT Sheetmaster® – efficient automation

Loading

- Controlled sheet separation with double sheet detection
- Sensor controlled machine location

Unloading


- Programmed stacking or dropping to defined location while production is running
- Safe skeleton removal
- Simultaneous machine operation
- Compact layout
- Turns a machine into a Flexible Cell, with linkage to a material storage system

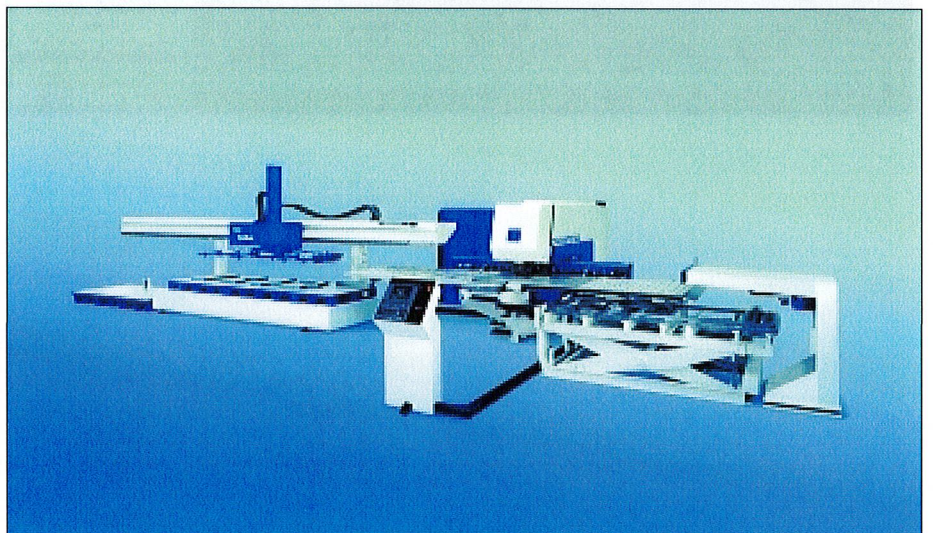



High performance with PC panel: TRUMPF CNC TRUMAGRAPH CC 220 S

- Fast work cycle times through short block cycle times
- Larger standard working memory
- Larger part program memory
- Parallel programming through integrated graphics eg. for small batches and prototypes
- User friendly operation
- Teleservice for fast and reliable diagnostic support
- Integrated disk drive
- Low-radiation TFT color screen

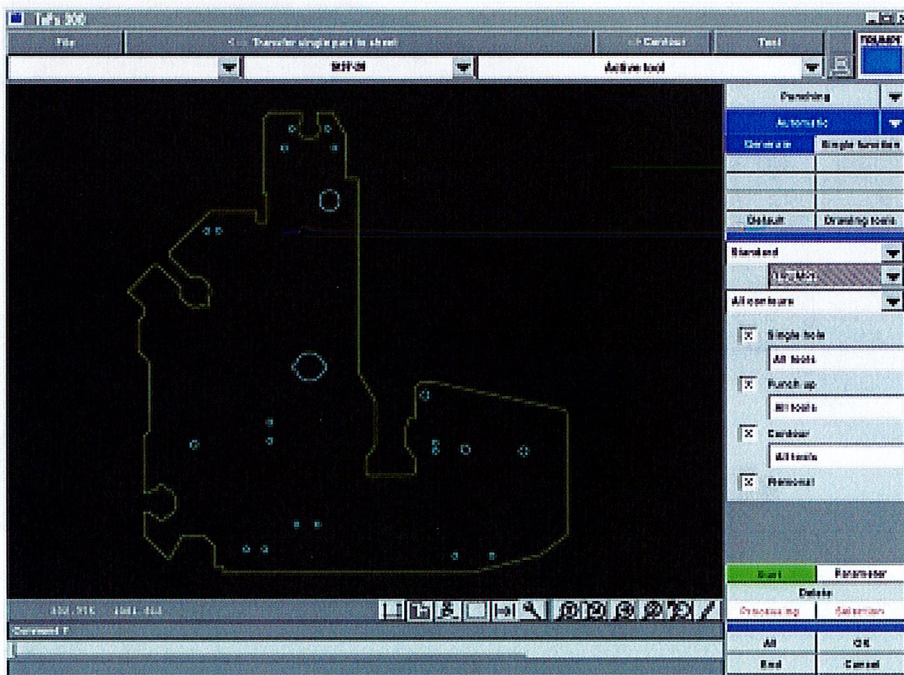


The right CAD/CAM System for each application

ToPs 300 –

Technology oriented Programming system

- Drawings can be created with easy-to-use geometry editor or CAD data imported from alternative systems
- Flexible parts programming
- Automatic processing definition of parts
- Runs on personal computers

TRUMPF is certified in accordance with DIN ISO 9001



TRUMPF Ltd
President Way, Airport Executive Park
Luton, Bedfordshire LU2 9NL
England

Telephone: (01582) 72 53 35
Telefax: (01582) 39 92 50
E-mail: sales@uk.trumpf.com
Internet: <http://www.trumpf.com>

IDENT-Nr. 123468-10-11-00 – Subject to changes

TRUMPF is certified in accordance with DIN ISO 9001

TRUMPF



TRUMPF GmbH + Co. KG
P.O. Box
D-71252 Ditzingen

Telephone: +49 (0)7156 303-0
Telefax: +49 (0)7156 30 33 09
E-mail: info@de.trumpf.com
Internet: <http://www.trumpf.com>

Technical Data

TRUMATIC 500R-1300

TRUMATIC 500R-1600

Working range (X x Y)
before repositioning
with full table support

2535 x 1280 mm

3085 x 1650 mm

Performance

Max. punching force

220 kN

220 kN

Max. sheet thickness

8 mm

8 mm

Max. workpiece weight

200 kg

230 kg

Max. punching diameter

76.2 mm

76.2 mm

Speeds

Max. positioning speed parallel

X axis

90 m/min

90 m/min

Y axis

60 m/min

60 m/min

simultaneous

108 m/min

108 m/min

C axis rotation

360°/s fully rotating

360°/s fully rotating

Max. stroke rate¹ punching 1 mm pitch
 punching 25 mm pitch
 marking

900 1/min

780 1/min

445 1/min

355 1/min

1700 1/min

1700 1/min

Type of drive

X/Y/C axes

Maintenance free AC motors

Maintenance free AC motors

Punching head

Hydraulic drive

Hydraulic drive

Accuracy²

Positioning accuracy

±0.1 mm

±0.1 mm

Repeatability

±0.03 mm

±0.03 mm

Automatic tool changer

Linear magazine²

18 tools with 2 clamps

18 tools with 3 clamps

No. of tools if using Multitool®

up to 108 tools with 2 clamps

up to 108 tools with 3 clamps

Tool changing time approx.

1.5 - 5 s

1.5 - 5 s

Programmable Chutes

For punch parts max.

500 x 500 mm

500 x 500 mm

TRUMPF Control

NC program memory

Bosch CC 220 S

Bosch CC 220 S

TFT color screen

2 MB

2 MB

Disk drive

10.4"

10.4"

Platform

3.5"

3.5"

Shopfloor programming

PC Pentium with Windows NT

PC Pentium with Windows NT

TRUMAGRAPH

TRUMAGRAPH

Power requirements

Electrical

17 kVA

17 kVA

Pneumatic

7 bar

7 bar

Dimensions and weights (approx.)³

Space requirements with

Light curtain-safety system

6900 x 5800 mm

7900 x 6300 mm

Height

2200 mm

2200 mm

Weight

11000 kg

13000 kg

1 Different technical data applicable with option »Retractable Clamps«.

2 The accuracy that can be achieved in the workpiece is dependent on the sheet thickness, the sheet size, the location of the workpiece within the working area and on the tool geometry. According to VDI/DGQ 3441 – length of measurement 1 m.

3 Approximate values. Precise data can be taken from the valid installation plan.