




SuperJet

Metal Chip WASHING And COLLECTING Machine
HYDROLANT FILTRATION

Power consumption
down time
efficient
friendly
easy


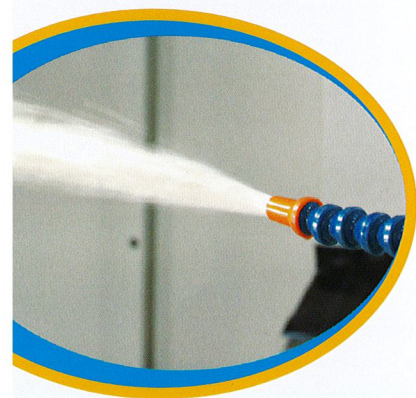


How do you manage the metal chips scattered everywhere of machine?
By manual cleaning is not easy and potentially hazardous for operator.

**We present you SUPERJET, The Most Efficient
Cleaning Master for Chip and Coolant problem,
it provides quick and safe cleaning.**



Washing In The Front Door Of Machine

Washing pipe & tube can be
extended accordingly to reach
most far area of machine

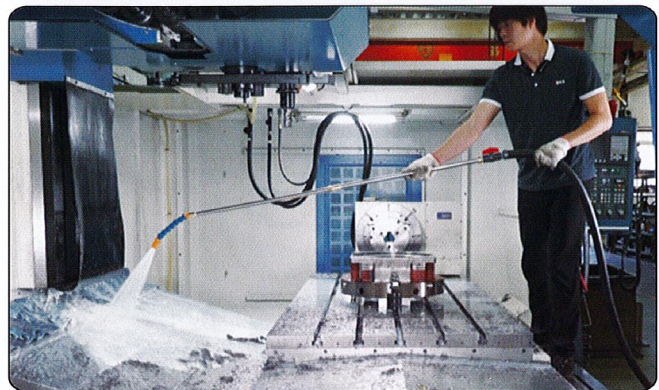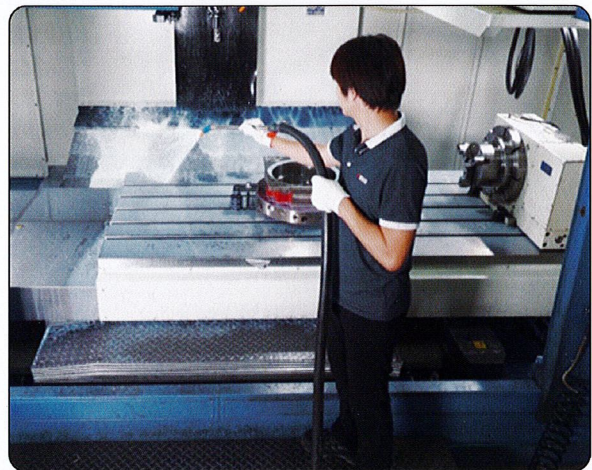


Washing From The Side Door Of Machine

For large machine, it will be more convenient to do from the side door, especially to the nook and corner areas

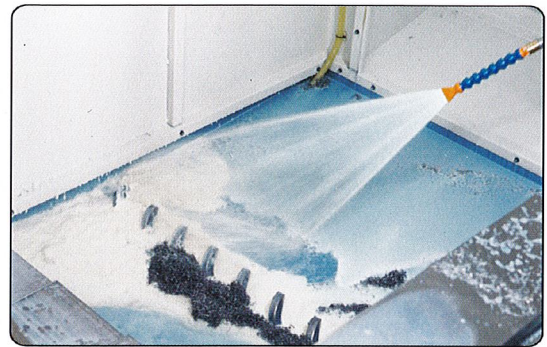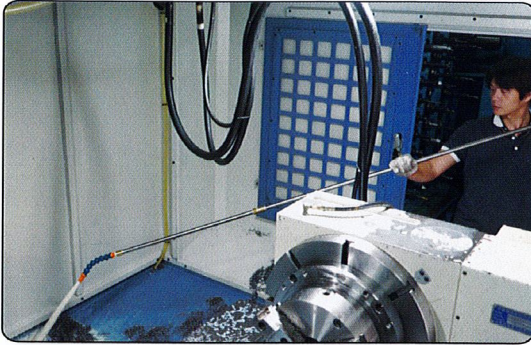

Total length of machine with all pipe and tube is 11,700mm (11.7M), see layout, it should be long enough to cover most of large VMC and Gantry machine

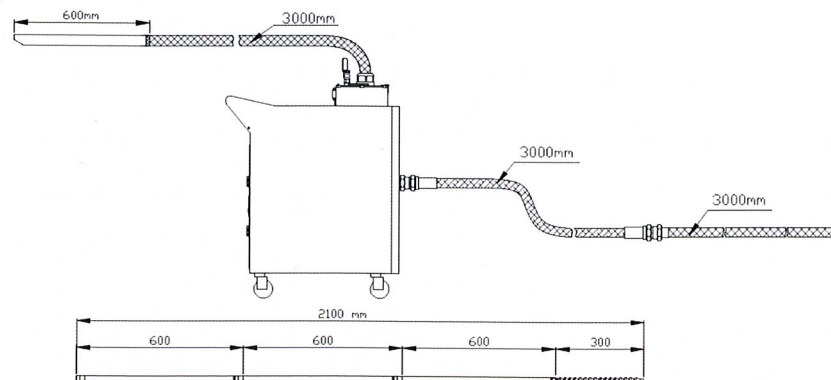

Chip Collection


SuperJet provides also Metal chip and Coolant Filtration function. With its powerful diaphragm pump, it helps to remove chip and sludge from the bottom of coolant tank easily.

It is very helpful for for Milling, Turning and Sawing machine coolant tank maintenance. It can also be used for Grinding machine if finer mesh-net is adopted.

IN / OUT pipes are adopted to work together, to blow the bottom chip and sludge up for easy sucking



Two different length of pipe are provided for different working condition. For narrow or difficult area, the short one will be more convenient to use.

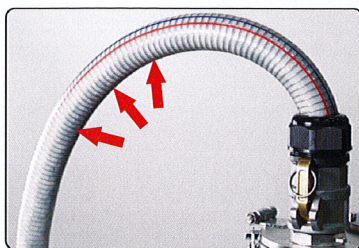

We can see the chips coming through the clear inlet pipe during operation



Chips been collected in the mesh-net

Machine has mesh-net size #40 as standard, it can be also provided with #80 net for finer particle collection, such as Grinding powder...

Pumping Out Coolant

During maintenance, the entire coolant unit needs to be pumped out
By using **SuperJet**, a common 300 liter coolant tank can be done in few minutes, clean coolant pumped back after work




Magnetic holding chain helps to hold pipe quickly and stably



Pipe Storage







Accessory Locker

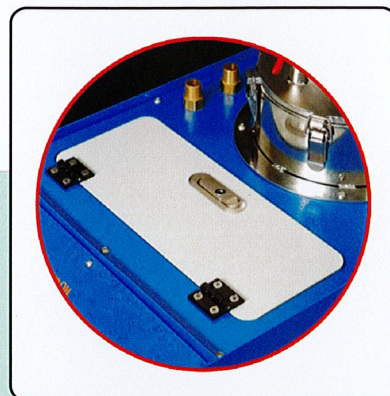

Standard accessory

- 1 1 1/4" coolant inlet pipe, 3 meters, x 1
- 2 1" coolant outlet pipe, 3 meters, x 1
3/4" additional coolant outlet pipe, 3 meters, x 1
- 3 3/4" stainless steel coolant gun, 600mmX3.
- 4 IN & OUT stainless steel tube, long and short x 1 each
- 5 Magnetic holding chain x 1
- 6 1/2" adjustable nozzle, round & flat x1 each
- 7 Pipe connector x 1
- 8 IN & OUT steel tube holding block x 2
- 9 Air gun + pipe x 1
- 10 Coolant valve + connector x 1
- 11 Pipe bind x 4

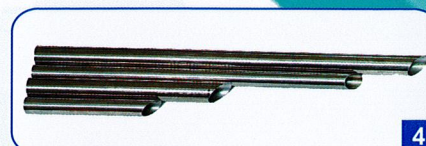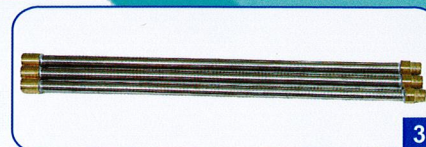

Diaphragm pump

Weight	10 kgs
Coolant inlet size	1" PT
Air inlet size	3/8" PT
Air pressure	0.5 - 8.3 bars (kgf/c

Machine Specification

Model	SuperJet
Tank capacity	6.5L
Max. capacity	180 liters/ per-min (clean water test)
Max. air pressure	8.3 bars
Material	304 stainless steel
Net weight	65kgs
Measurement	700x400x860mm

YC Machinery Co., Ltd

No. 26, Dawei Road, Dali Dist., Taichung Taiwan

Tel : 886-4-24079866

E mail: tim@ycmachinery.info

Distributor: