


ROMAC

Multi-Purpose Notching Machines

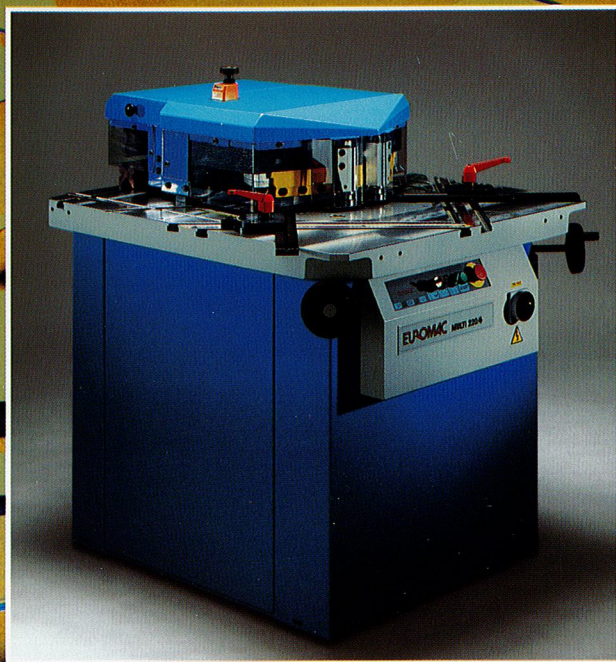

Euromac Notching Machines Help You Manufacture Greater Profits.

The high productivity of Euromac hydraulic notching machines is demonstrated daily by more than 6,000 users all over the world. Euromac notcher owners manufacture thousands of different products using our fixed-angle notchers, variable-angle notchers, and our Multi-notchers with double working stations. Euromac notchers offer

many exclusive features, including our internationally-patented automatic blade gap adjustment system, a rigid monoblock construction, and extended cutting lengths for specific jobs. These and other high-quality features make Euromac notchers fast, productive, long-lasting machines with a superior return on investment.

Optional Multi-Purpose
Back Station

Punching

Radiusing

Bending

Pressing

Slotting

Euromac offers the flexibility of four different styles of hydraulic notching machines.



Fixed-Angle Notchers



Fixed-Angle Multi Notchers



Variable-Angle Notchers




Variable-Angle Multi Notchers

Precise, High-Production
Front Station


Variable-
or Fixed-Angle
Notching

EUROMAC


Get More Production Power With These Multi-Purpose Workstations.

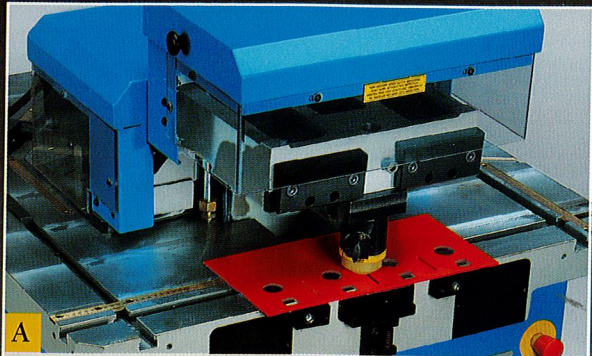


A **Tool-Holder for Punching**
Accepts conventional Trumpf-style round, square, & shaped tools up to 50 mm in diameter.

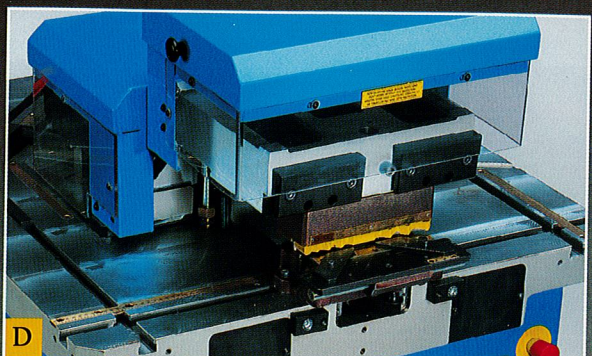

D **Radiusing Unit**
Various pre-sets for instant corner radiusing (3-15 mm radii) in materials up to 6 mm thick.

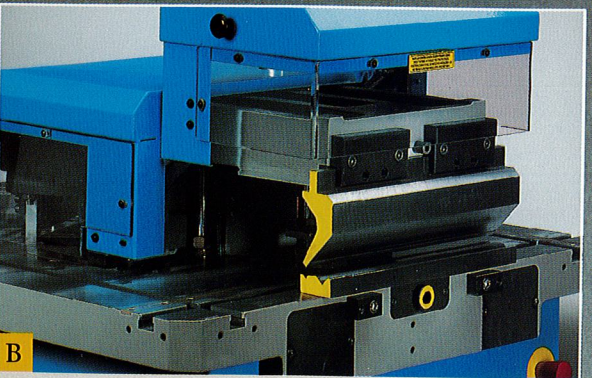

B **Press Brake Tooling**
Bends metal up to 415 mm long (5 mm thick) without disrupting your larger press brake.

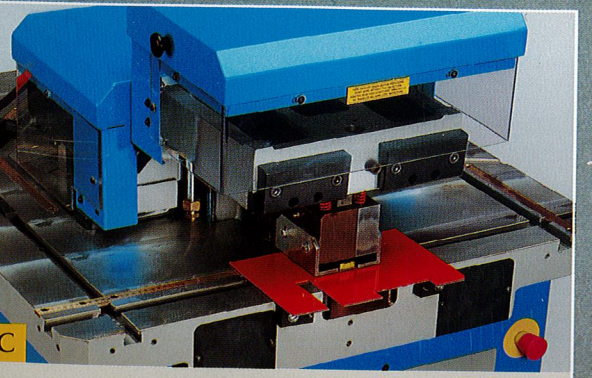

C **Rectangular Cutting Unit**
For cutting slots (25 x 100/150 mm) in materials up to 4 mm thick.


Fast Hydraulic Action for Maximized Productivity

Cut Your Costs! Burr-Free Notching from 1 mm to 6 mm



Available Gap, Back Station: F/A 150 mm, V/A 270 mm

A Euromac Multi is much more than a notcher — it's a full-featured fabrication center! Multi's are ideal for creating prototypes and short runs, with notching,


punching, bending, radiusing, and rectangular cutting — all in one machine! Plus, the back station can also be used as a multi-purpose press, for even more flexibility.

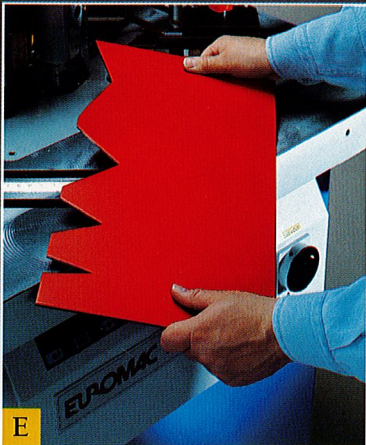

E **Variable Angle Notching**
Infinitely adjustable from 30° to 140°
(Variable-Angle models only)

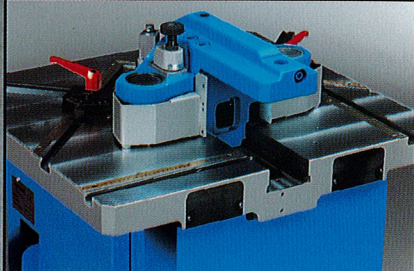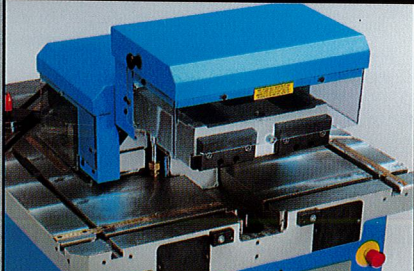Euromac Multi Notchers Feature Comparison						
	Variable-Angle Notching	Punching	Bending	Radiusing	Rectangular Cutting	Pressing (up to 20 tons)
 200/6 Fixed-Angle Multi		●		●	●	
 220/6 Variable-Angle Multi	●	●	●	●	●	●

Quality With Euromac's Automatic Blade Gap Adjustment.

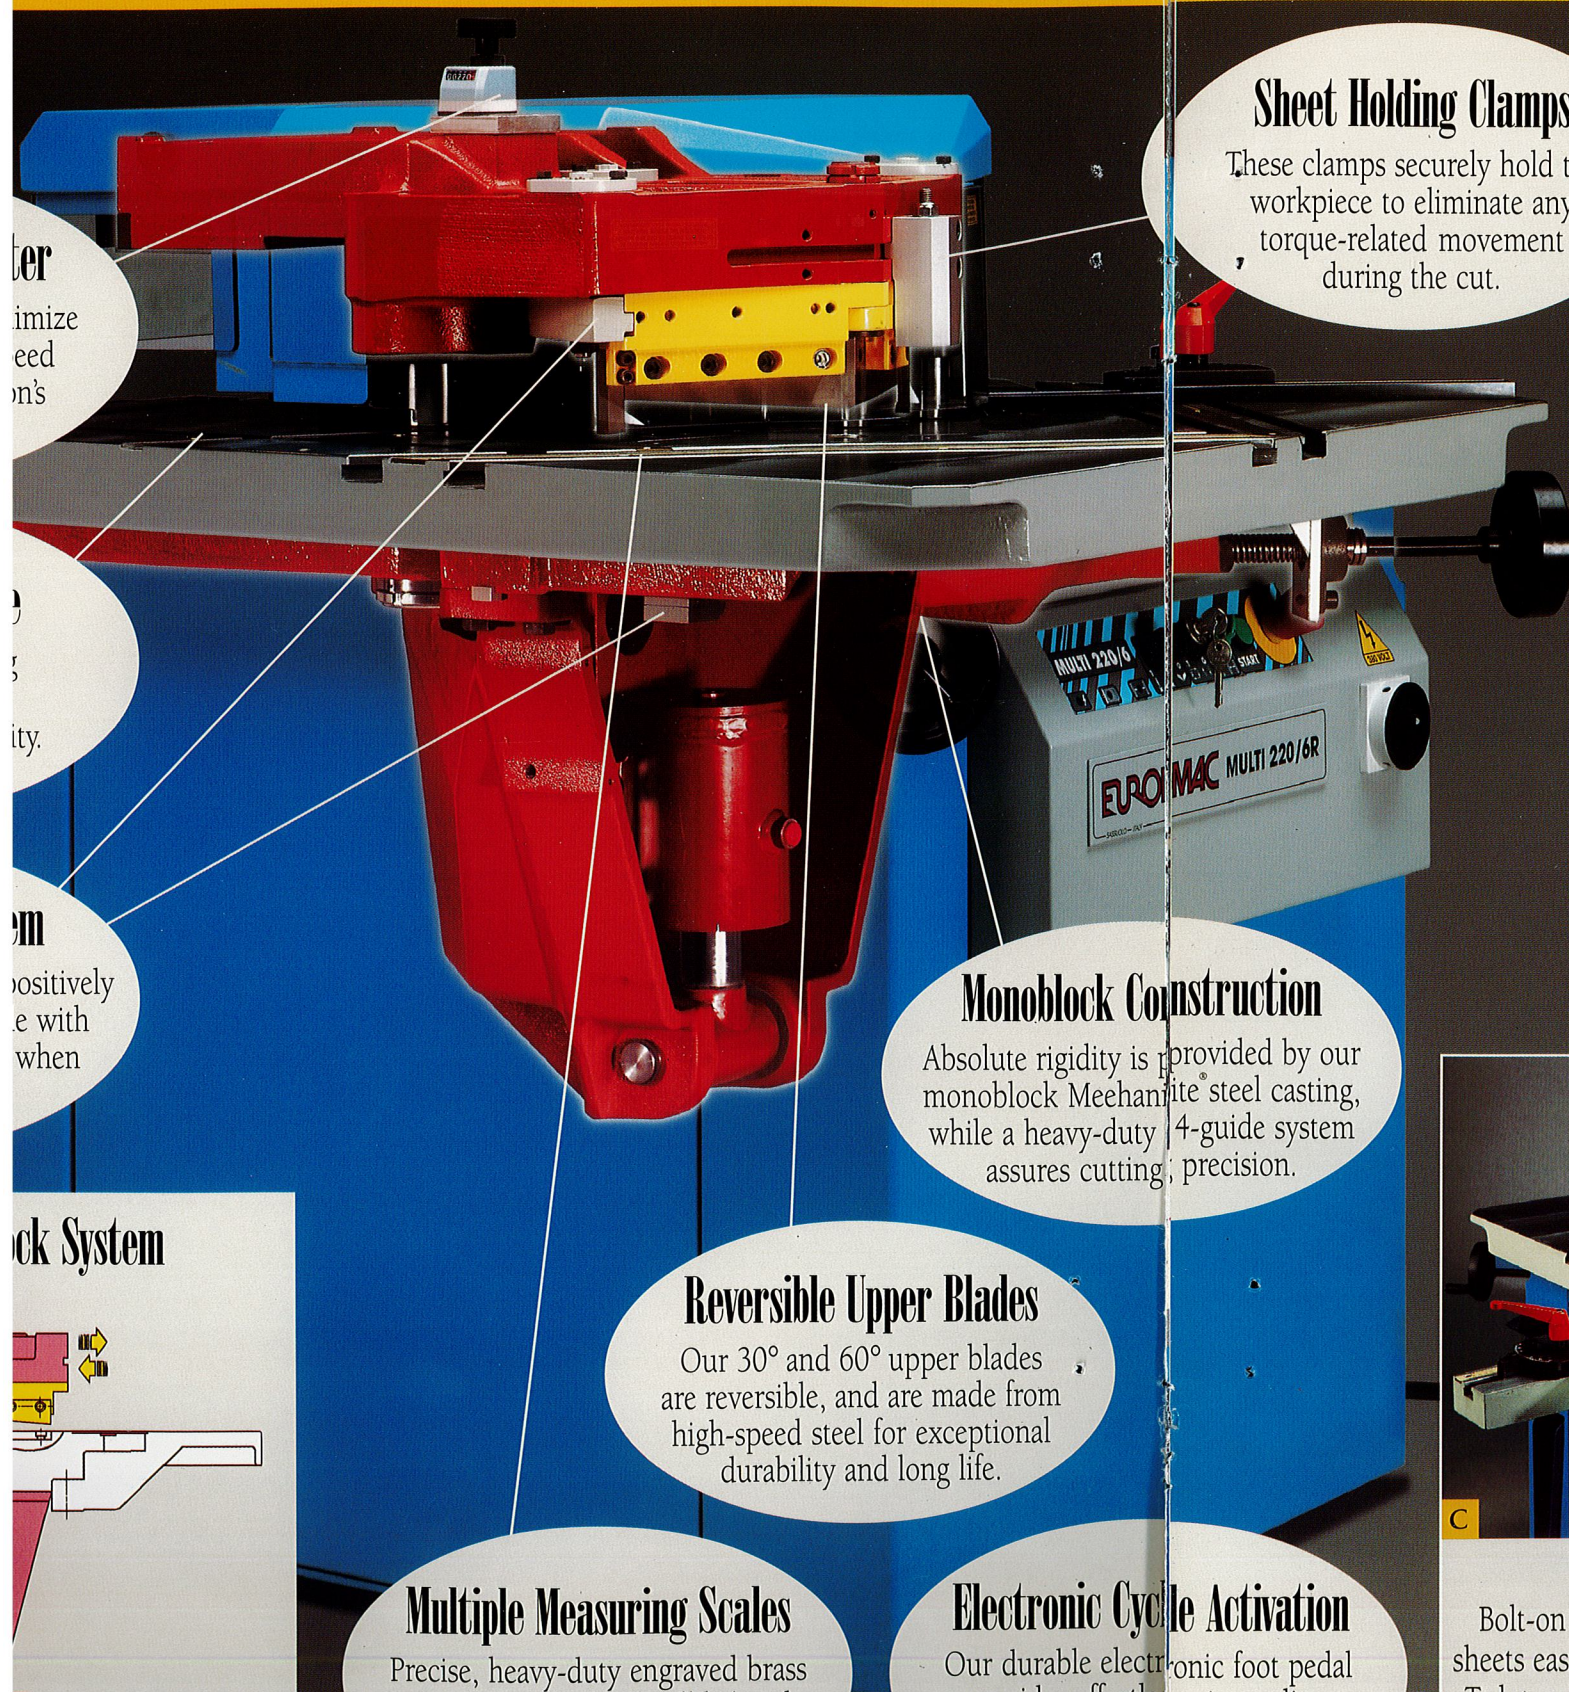

Sheet Holding Clamps

These clamps securely hold the workpiece to eliminate any torque-related movement during the cut.

Monoblock Construction

Absolute rigidity is provided by our monoblock Meehanite® steel casting, while a heavy-duty 4-guide system assures cutting precision.

Reversible Upper Blades

Our 30° and 60° upper blades are reversible, and are made from high-speed steel for exceptional durability and long life.

Multiple Measuring Scales


Precise, heavy-duty engraved brass

Electronic Cycle Activation

Our durable electronic foot pedal

With each cut, Euromac's patented Automatic Blade Gap Adjustment System instantly sets the lateral distance between the upper and lower cutting blades for optimum cutting. This saves time


that would otherwise be spent in machine adjustment or in burr removal. It also lengthens blade life, while eliminating the costly material waste normally associated with "trial and error" machine adjustments.

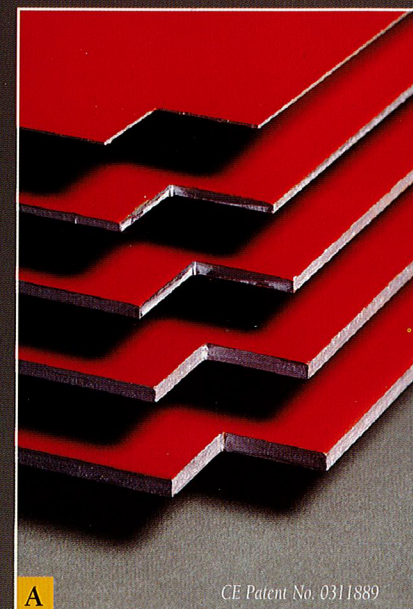

Automatic


Blade Gap Adjustment

Euromac notchers provide perfect, burr-free cuts in various materials up to 6 mm, without manual adjusting.

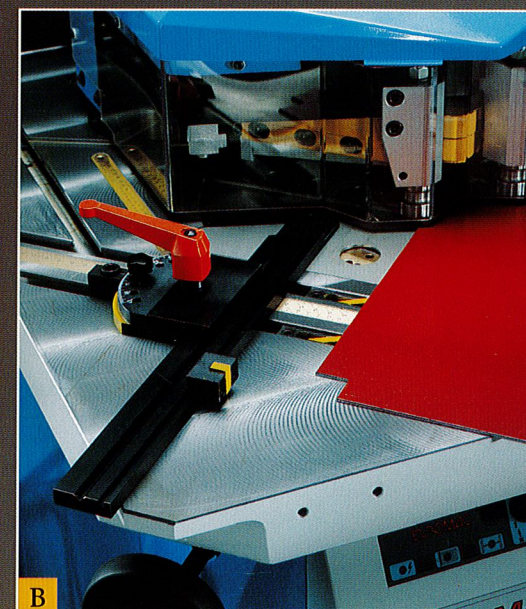

Precision Sheet Positioning Systems

- Protractors with heavy steel handles and pin-locking pre-sets at 15° intervals, plus extra clamping for notching heavy plate.
- Optional Disappearing Stops in table's double T-slots for easy multiple set-ups.

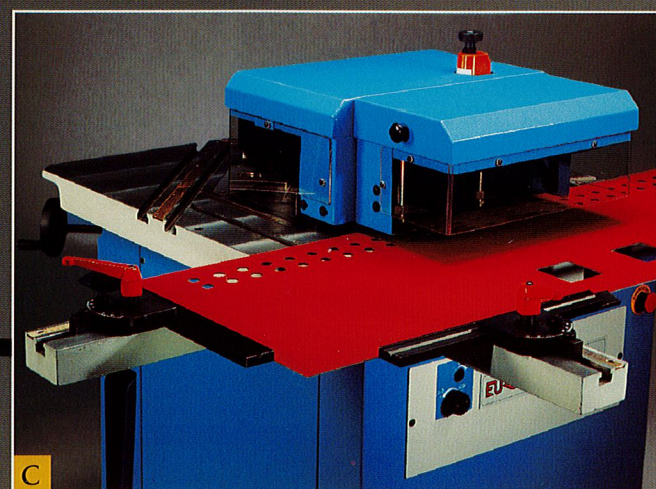

Optional Table Extensions

Bolt-on extension arms make working with large sheets easier, either on front or back station. Built-in T-slots and engraved scales assure cutting accuracy.




Extended Cutting Length

Our notchers cut repeatedly in a straight line, infinitely extending the cutting length, while maintaining a consistent cutting speed.

Quality Notchers From Euromac

There's an ideal Euromac notcher for practically any task you need to accomplish. Simply select the model with the combination of power and features that best suits your particular requirements.

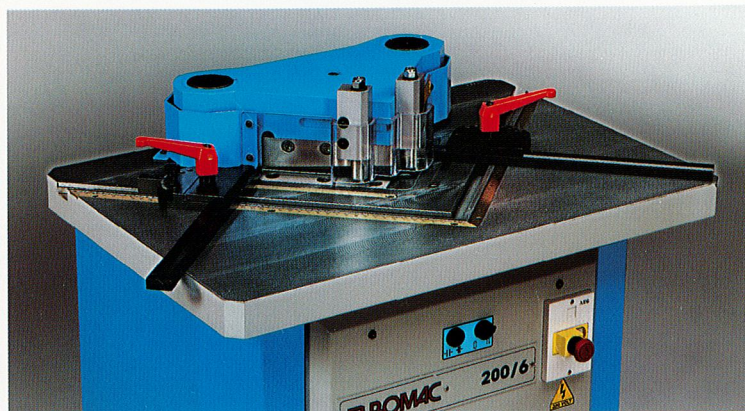


200/6 Fixed Angle Notcher



200/6 Fixed Angle Multi Notcher



220/6 R Variable Angle Notcher

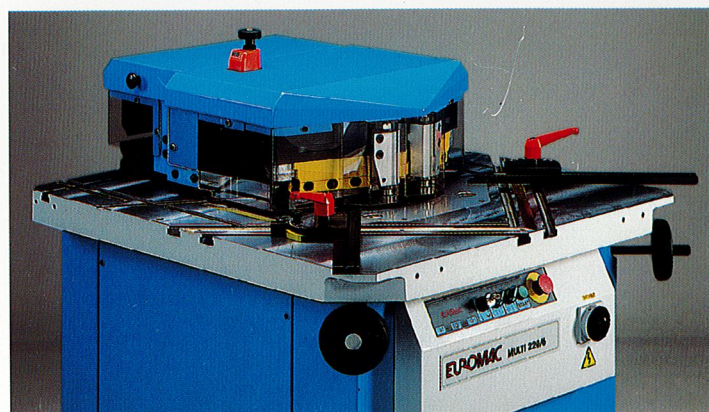

220/6 Variable Angle Multi Notcher

Specifications

Machine Model	200/6 F/A	200/6 F/A Multi	220/6 R V/A	220/6 V/A Multi
Blade Length	200 mm	200 mm	220 mm	220 mm
Material Capacity (42 Kg./mm ² Mild Steel)	6.5 mm	6.5 mm	6.5 mm	6.5 mm
Strokes/Minute, Maximum Cutting Length	50	50	50	50
Strokes/Minute, 50 mm Cut	65	65	80	80
Table Dimensions	850 x 600 mm	850 x 800 mm	950 x 790 mm	950 x 1030 mm
Overall Dimensions (W x D x H)	780 x 600 x 1020 mm	850 x 800 x 1150 mm	1000 x 860 x 1200 mm	1100 x 950 x 1280 mm
Weight	480 Kg	540 Kg	950 Kg	1060 Kg

Additional specifications available upon request. Specifications subject to change without notice.

EUROMAC

Via per Sassuolo, 68/G, 41043 Formigine (MO), Italy
 Telephone: +39 059 579511 • Fax: +39 059 579512
 E-mail: euromac@euromac.it • Internet: www.euromac.it



Euromac also manufactures high-quality Bending Machines and Punching Machines. Ask your distributor for more information, or visit our web site at www.euromac.it.